

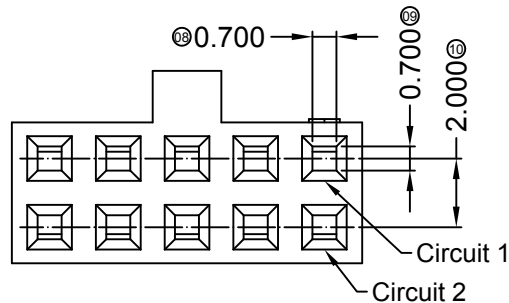
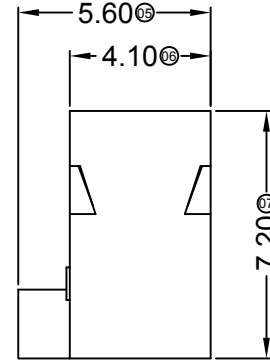
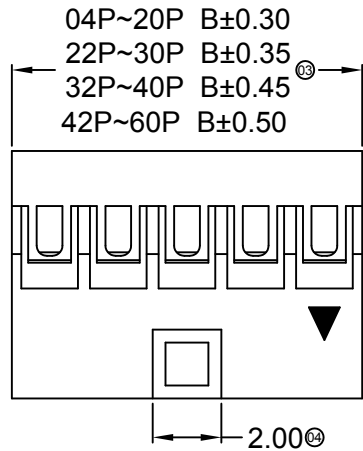


RoHS  Lead-free

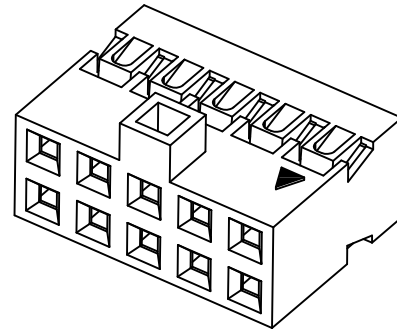

■ Specifications :

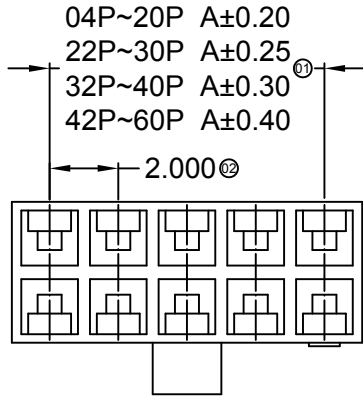


- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 H X-2\*XX H-XX XX  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: 2\*XX-2\*02P~2\*30P
- ⑤ Plug the Pin & special No.: H-Salient points higher
- ⑥ Material: N0-PA66 UL 94V-0; PT-PBT UL 94V-0
- ⑦ Color: Blank-Natural Color  
HF-Halogen Free


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*02	2.00	4.20	2*14	26.00	28.20
2*03	4.00	6.20	2*15	28.00	30.20
2*04	6.00	8.20	2*16	30.00	32.20
2*05	8.00	10.20	2*17	32.00	34.20
2*06	10.00	12.20	2*18	34.00	36.20
2*07	12.00	14.20	2*19	36.00	38.20
2*08	14.00	16.20	2*20	38.00	40.20
2*09	16.00	18.20	2*21	40.00	42.20
2*10	18.00	20.20	2*22	42.00	44.20
2*11	20.00	22.20	2*23	44.00	46.20
2*12	22.00	24.20	2*24	46.00	48.20
2*13	24.00	26.20	2*25	48.00	50.20

4601H-2*XXH-N0HF	PA66 UL 94V-0 Halogen Free	4601T	4601W
4601H-2*XXH-PT	PBT UL 94V-0		
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Heade Or Box Header



A		B		C		D		E		F		G		H		
2014/12/08	B	C		Space of a Whole page Changes	Wuxiaotao	Jova	GENERAL TOLERANCE		 <b>思索连接器有限公司</b> <b>SWB CONNECTORS CO.,LTD</b>				PART NO. 4601H-2*XXH-XXXX			
2013/09/23	A	B	ECN2013082501	Modify drawing frame format 	Jova		.X ±0.30	.XX ±0.20	.XXX ±0.10	APPROVAL	CHECK	DRAWN	DATA	TITLE 2.00mm Crimp Style Connectors		
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	 Success Sun Kaibao Jova 2007/05/03				UNIT MM	SCALE 1:1	NUMBER A-106	REV C	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	

RoHS  Lead-free



04P~20P A±0.20  
 22P~30P A±0.25  
 32P~40P A±0.30  
 42P~60P A±0.40

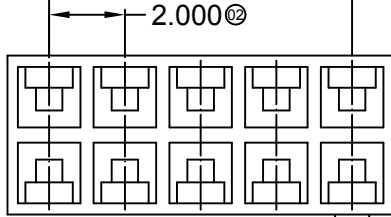

04P~20P B±0.30  
 22P~30P B±0.35  
 32P~40P B±0.45  
 42P~60P B±0.50

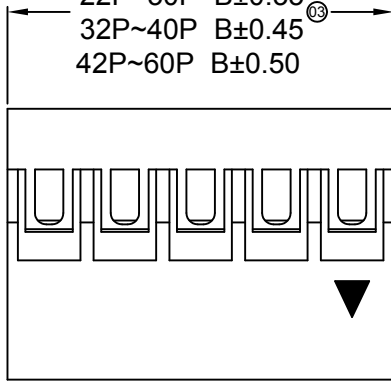

Circuit 1  
 Circuit 2

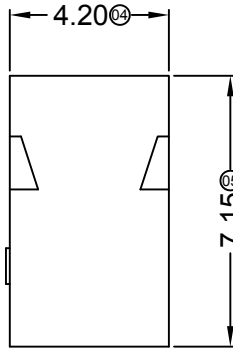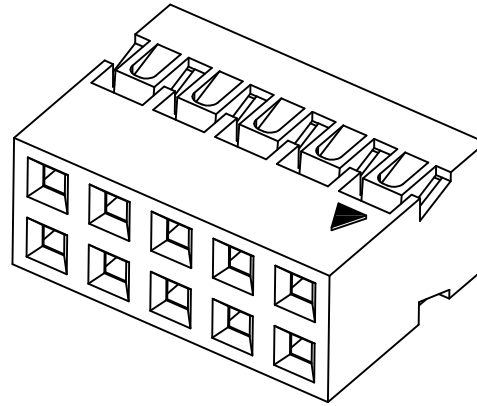

■ Specifications :



- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 H X-2\*XX X-N0 XX  
 ① ② ③ ④ ⑤ ⑥ ⑦







- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: 2\*XX-2\*02P~2\*30P
- ⑤ Plug the Pin & special No.:
- ⑥ Material: N0-PA66 UL 94V-0
- ⑦ Color: Blank-Natural Color  
 HF-Halogen Free

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*02	2.00	4.20	2*17	32.00	34.20
2*03	4.00	6.20	2*18	34.00	36.20
2*04	6.00	8.20	2*19	36.00	38.20
2*05	8.00	10.20	2*20	38.00	40.20
2*06	10.00	12.20	2*21	40.00	42.20
2*07	12.00	14.20	2*22	42.00	44.20
2*08	14.00	16.20	2*23	44.00	46.20
2*09	16.00	18.20	2*24	46.00	48.20
2*10	18.00	20.20	2*25	48.00	50.20
2*11	20.00	22.20	2*26	50.00	52.20
2*12	22.00	24.20	2*27	52.00	54.20
2*13	24.00	26.20	2*28	54.00	56.20
2*14	26.00	28.20	2*29	56.00	58.20
2*15	28.00	30.20	2*30	58.00	60.20
2*16	30.00	32.20			

4601H-2*XX-N0HF	PA66 UL 94V-0 Halogen Free	4601T	4601W
4601H-2*XX-N0	PA66 UL 94V-0		
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Heade Or Box Header

A		B		C		D		E		F		G		H		
2014/12/05	B	C		Space of a Whole page Changes	Wuxiaotao	Jova	GENERAL TOLERANCE		 <b>思索连接器有限公司</b> SWB CONNECTORS CO.,LTD				PART NO. 4601H-2*XX-N0XX			
2013/09/23	A	B	ECN2013082501	Modify drawing frame format 	Jova		.X ±0.30	.XX ±0.20	.XXX ±0.10	APPROVAL	CHECK	DRAWN	DATA	TITLE 2.00mm Crimp Style Connectors		
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	Success	Sun Kaibao	Jova	2007/05/03	UNIT MM	SCALE 1:1	NUMBER A-057	REV C	

RoHS  Lead-free

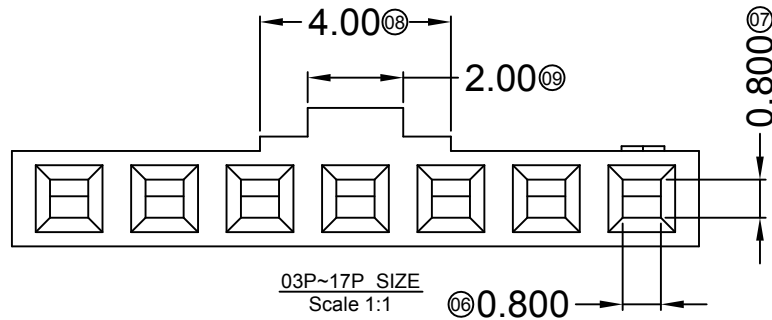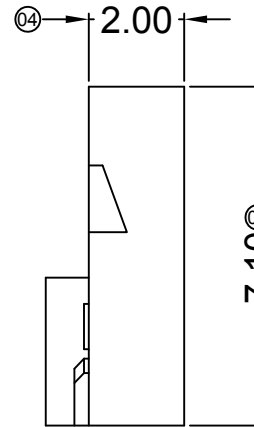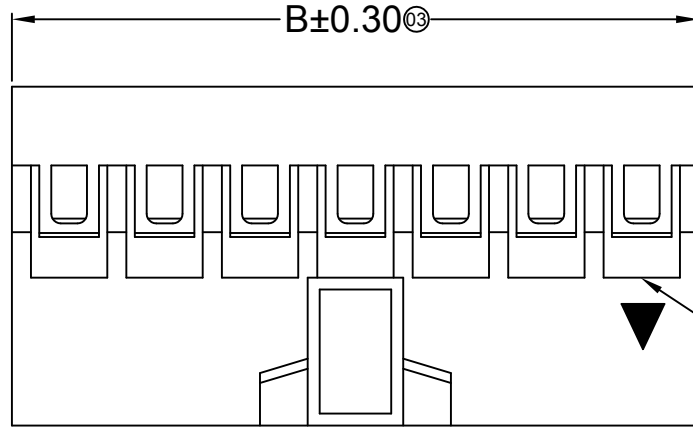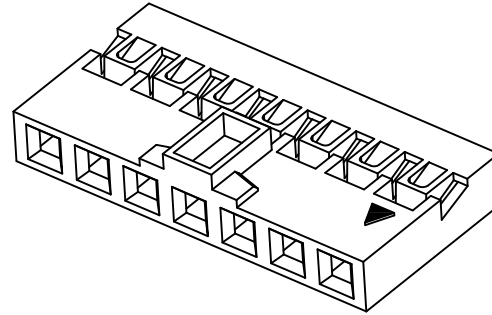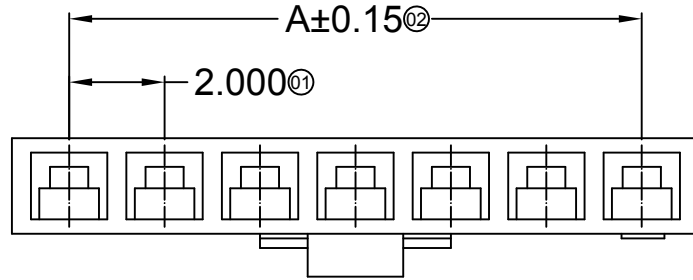

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 H X-XX A-N0 XX XX  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: XX-02P~17P
- ⑤ Plug the Pin & special No.:  
A-With Salient Point
- ⑥ Material: N0-PA66 UL 94V-0
- ⑦ Color: Blank-Natural Color ;  
BK-Black
- ⑧ HF-Halogen Free

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	4.40	10	18.00	20.40
03	4.00	6.40	11	20.00	22.40
04	6.00	8.40	12	22.00	24.40
05	8.00	10.40	13	24.00	26.40
06	10.00	12.40	14	26.00	28.40
07	12.00	14.40	15	28.00	30.40
08	14.00	16.40	16	30.00	32.40
09	16.00	18.40	17	32.00	34.40

4601H-XXA-N0BKHF	PA66 UL 94V-0 Halogen Free Black	4601T-A	4601W
4601H-XXA-N0HF	PA66 UL 94V-0 Halogen Free		
4601H-XXA-N0	PA66 UL 94V-0		
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Heade Or Box Header

2014/12/04	C	D		Space of a Whole page Changes	Wuxiaotao	Jova
2014/02/14	B	C		Correct the rated current of 3A Change PIN 1	Bob	
2013/09/23	A	B	ECN2013082501	Modify drawing frame format	Jova	
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL





GENERAL TOLERANCE  
.X ±0.30  
.XX ±0.20  
.XXX ±0.10



思索连接器有限公司  
SWB CONNECTORS CO.,LTD

APPROVAL	CHECK	DRAWN	DATA
Success	Sun Kaibao	Jova	2007/05/03

PART NO. 4601H-XXA-N0XX			
TITLE 2.00mm Crimp Style Connectors			
UNIT	SCALE	NUMBER	REV
MM	1:1	A-106	D

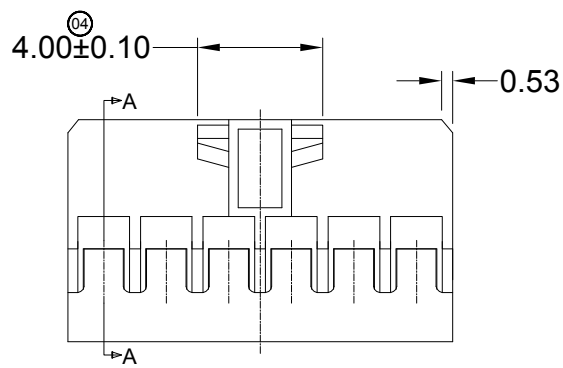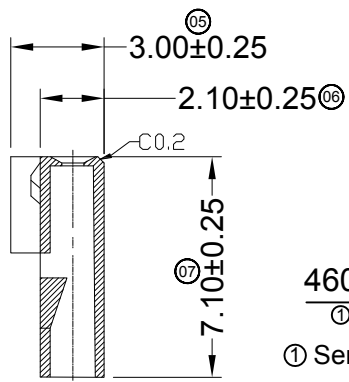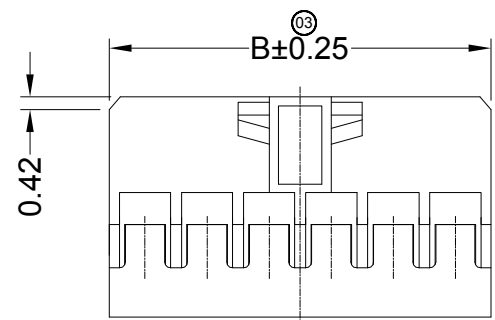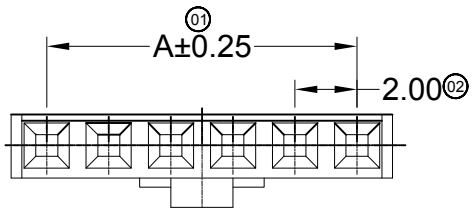

SECTION: A-A  
SCALE: 1:1

■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 H X-XX B-N0 XX HF  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧




- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: XX-Single Row
- ⑤ Plug the Pin & Special No.: B-With Salient Point and Bevel
- ⑥ Material : N0-PA66 94V-0 ; PT-PBT 94V-0
- ⑦ Color: Blank : Natural Color Black WH-White
- ⑧ HF-Halogen Free ;

Poles	Dimensions (mm)	
	A	B
02	2.00	4.25
03	4.00	6.25
04	6.00	8.25
05	8.00	10.25
06	10.00	12.25
07	12.00	14.25
08	14.00	16.25
09	16.00	18.25
10	18.00	20.25
11	20.00	22.25
12	22.00	24.25
13	24.00	26.25
14	26.00	28.25
15	28.00	30.25


4601H-XXB-N0WH	PA66 UL 94V-0 White	4601T -A	4601W	1,000Pcs
4601H-XXB-N0HF	PA66 UL 94V-0 Halogen Free			
4601H-XXB-N0	PA66 UL 94V-0			
PART NO	Material	Suitable SWB Terminal	Mates With SWB Pin Heade Or Box Header	Q'ty/Bag

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE	NUMBER	REV	
2014/04/05	B	C		Add White Part No.	Jova		GENERAL TOLERANCE	 <b>东莞市思索连接器有限公司</b> DongGuan Siweb Connectors CO.,LTD				PART NO. 4601H-XXB-N0XX	TITLE 2.00 mm Crimp style Connector			
2013/09/23	A	B	ECN2013082501	Modify drawing frame format	Jova	.X ±0.30 .XX ±0.20 .XXX ±0.10	APPROVAL									UNIT MM
										Jova	2007/05/03					


RoHS  Lead-free

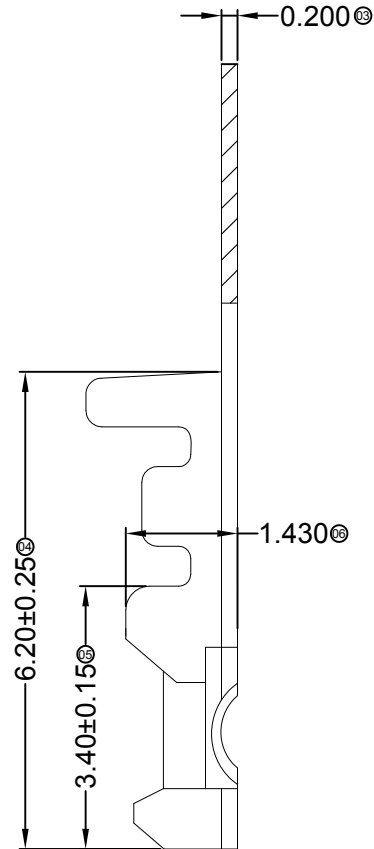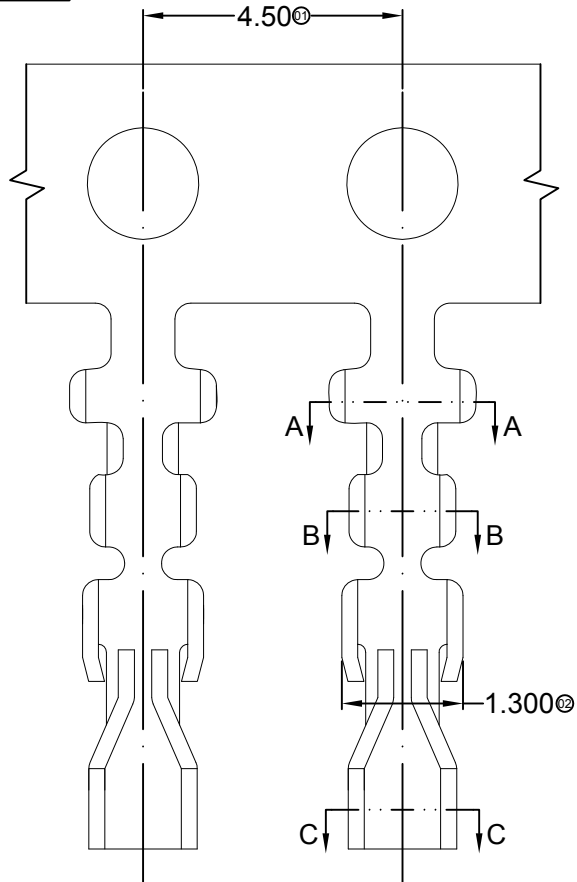

SECTION: A-A  
SCALE: 1:1



SECTION: B-B  
SCALE: 1:1



SECTION: C-C  
SCALE: 1:1

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 T X-P G01 X-T  
① ②③④ ⑤ ⑥⑦

- ① Series No.
- ② Category: T-Terminal
- ③ Appearance type: Blank-Ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating Style: G01-Gold Plated Contact
- ⑥ Plating Method : Blank-Stamping before Plating
- ⑦ Mold No./Mark/Special No. : T- Small Gap

4601T-PG01-T	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30u" Ni MIN.;Contact Area :Gold Flash
PART NO	Material	Wire Range	Insulation O.D.	Finish

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10


**SWB** 思索连接器有限公司  
TERMINAL&CONNECTORS SWB CONNECTORS CO.,LTD

PART NO. 4601T-PG01-T




TITLE 2.00 mm Crimp Style Connector

APPROVAL	CHECK	DRAWN	DATA
		Wuxiaotao	2014/11/14


UNIT	SCALE	NUMBER	REV
MM	1:1	A-019	A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT
							


RoHS  Lead-free

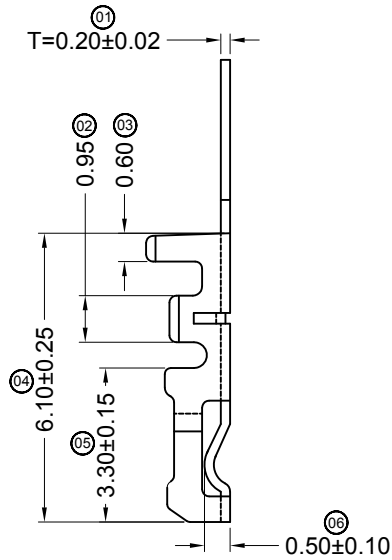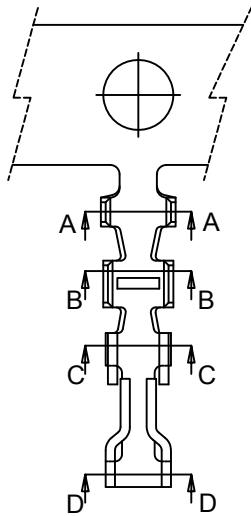


SECTION: C-C  
SCALE: 1:1



SECTION: D-D  
SCALE: 1:1



SECTION: A-A  
SCALE: 1:1



SECTION: B-B  
SCALE: 1:1

■ Specifications :



- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ






4601 T X-X XX X-A

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: T-Terminal
- ③ Appearance type: Blank-Ordinary
- ④ Material: P-Phosphor bronze  
B-Brass
- ⑤ Plating Style: G\*\*-Gold Plated Contact  
V\*\*- All Gold-Plated  
01-Gold Flash 02-2u" 03-3u"  
05-5u" 10-10u" 15-15u"  
SN-Bright Tin Plating (70-120u")  
SN1-Bright Tin Plating (120u" Min).  
0-No Plating Material  
SW- Fog Tin Plating
- ⑥ Plating Method : Blank-Stamping before Plating  
B-Plating before stamping
- ⑦ Mold No./Mark/Special No. : A- Small Gap Enhanced

4601T-PV01-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30~50u" Ni>Contact Area Gold:Gold Flash	4601H	10,000Pcs
4601T-PG01-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30~50u" Ni>Contact Area Gold:Gold Flash		
4601T-PSN-A	Phosphor Bronze	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30~50u" Ni;70~120u"Sn		
4601T-BG01-A	Brass	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30~50u" Ni>Contact Area Gold:Gold Flash		
4601T-BSN-A	Brass	AWG#26-30	1.40mm(Max)	Stamping Before Pating:30~50u" Ni;70~120u"Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In SWB Housing	Q'ty/Reel

A	2014/02/14	C	D	Correct the rated current of 3A	Bob	GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 <b>东莞市思索连接器有限公司</b> Terminal Connectors DongGuan Siweb Connectors CO.,LTD	PART NO. 4601T-XXX-A						
	2013/12/30	B	C	New materials issue, change the gold-plated code description 	Allen			TITLE 2.00 mm Crimp Style Connector						
	2013/08/23	A	B	Modify drawing frame format	Jova			APPROVAL	CHECK	DRAWN	DATA			
	DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	Jova	2011/08/01	UNIT MM	SCALE 1:1	NUMBER A-106	REV D

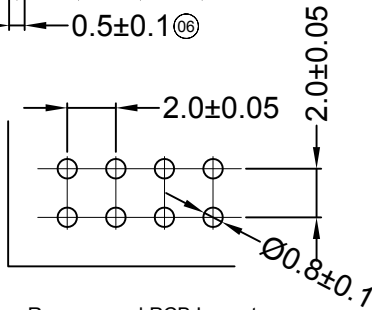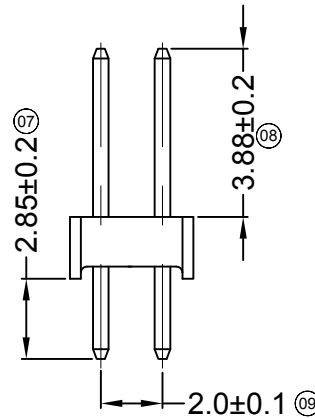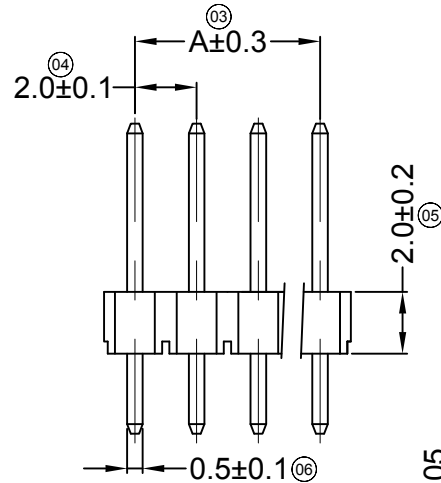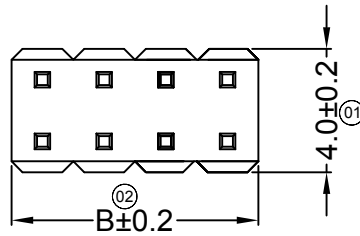

### Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

Poles	Dimensions (mm)	
	A	B
04	2.00	4.00
06	4.00	6.00
08	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

4601 W V X-2\*XX X-PT VXX XX-F  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180° ; R-90°
- ④ Welding Way: Blank-DIP ; S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row ; 2\*XX-Double Row
- ⑥ Plug the Pin & Special No. : F-Halogen Free
- ⑦ Material: PT -PBT 94V-0
- ⑧ Plating Category: G\*\*-Gold Plated Contact  
 V\*\*- All Gold-Plated  
 01-Gold Flash 02-2u" 03-3u"  
 05-5u" 10-10u" 15-15u"  
 SN-Bright Tin Plating (70-120u")  
 SN1-Bright Tin Plating (120u" Min).  
 0-No Plating Material  
 SW- Fog Tin Plating  
 HS-Hight temperature Tin
- ⑨ Color : Blank-Natural Color
- ⑩ F-DIP=2.85mm ; Contact PIN=4.00mm ; PIN Overall length=8.8mm  
 The PIN needle distance to the plastic Bottom=1.26mm

4601WV-2*XX-PTV01-F	PBT UL 94V-0	Brass	Gold-Flash	4601H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing	Q'ty/Bag

							GENERAL TOLERANCE				PART NO.				
							.X ±0.30				4601WV-2*XX-PTV01-F				
							.XX ±0.20				TITLE				
							.XXX ±0.10				2.00 mm Crimp Style connectors				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
2013/09/23	A	B	ECN2013082501	Modify drawing frame format	Jova		Terminal Connectors			Jova	2013/07/29	MM	1:1	A-106	A

**SWB** 思索连接器有限公司  
 Terminal Connectors SWB Connectors CO.,LTD

RoHS  Lead-free

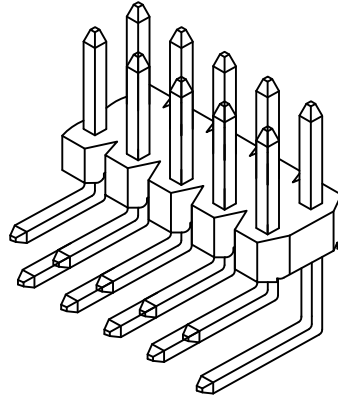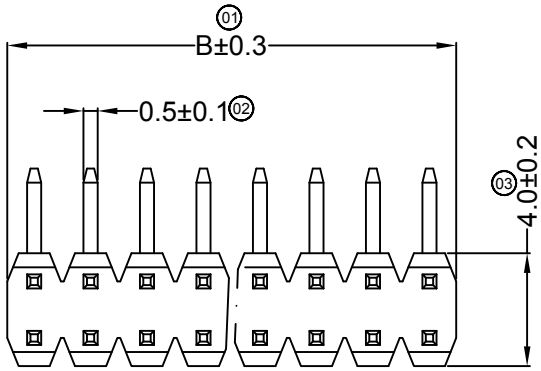

■ Specifications :




- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

Poles	Dimensions (mm)	
	A	B
04	2.00	4.00
06	4.00	6.00
08	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

4601 W R X-2\*XX X-PT V01 XX-L

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180° ; R-90°
- ④ Welding Way: Blank-DIP ; S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row ; 2\*XX-Double Row
- ⑥ Plug the Pin & Special No. :
- ⑦ Material: PT -PBT 94V-0
- ⑧ Plating Category: G\*\*-Gold Plated Contact  
V\*\*- All Gold-Plated  
01-Gold Flash 02-2u" 03-3u"  
05-5u" 10-10u" 15-15u"  
SN-Bright Tin Plating (70-120u")  
SN1-Bright Tin Plating (120u" Min).  
0-No Plating Material  
SW- Fog Tin Plating  
HS-Hight temperature Tin
- ⑨ Color : Blank-Natural Color
- ⑩ L-DIP=3.00mm ; Contact PIN=3.80mm ; PIN Overall length=15.0mm  
The PIN needle distance to the plastic Bottom=1.40mm

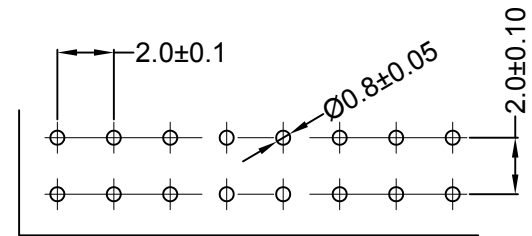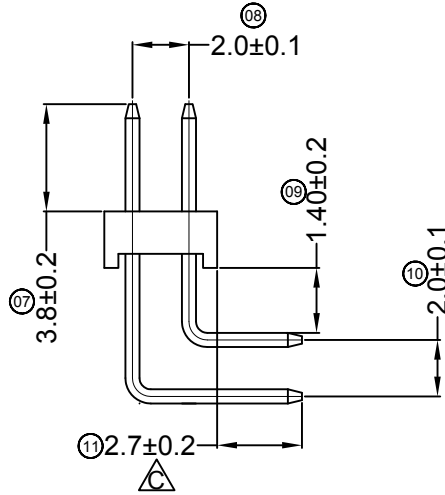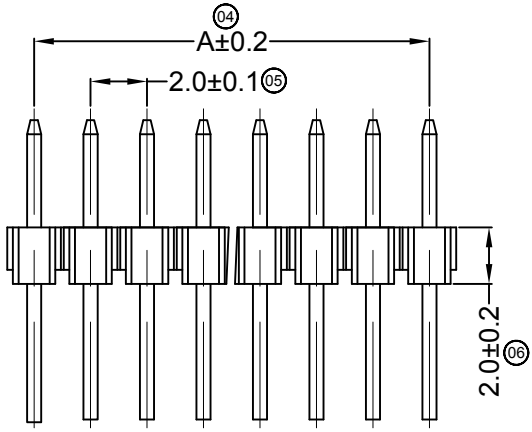

Recommad PCB Layout

4601WR-2*XX-PTV01-L	PBT UL 94V-0	Brass	Gold-Flash	4601H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing	Q'ty/Bag

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
2014/12/15	B	C		Modify the size	sylvia		GENERAL TOLERANCE					MM	1:1	A-106	C
2013/09/23	A	B	ECN2013082501	Modify drawing frame format	Jova		.X ±0.30								
							.XX ±0.20								
							.XXX ±0.10								
									Success	Sun Kaibao	Jova				
											2007/05/03				







**SWB** 东莞市思索连接器有限公司  
Terminal Connectors DongGuan Siweb Connectors CO.,LTD

PART NO. 4601WR-2\*XX-PTV01-L

TITLE 2.00 mm Crimp Style Connector



RoHS  Lead-free

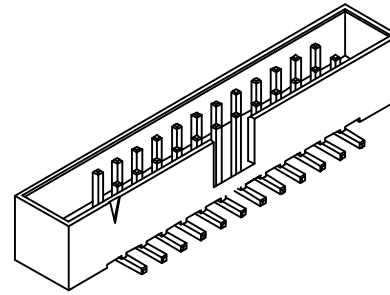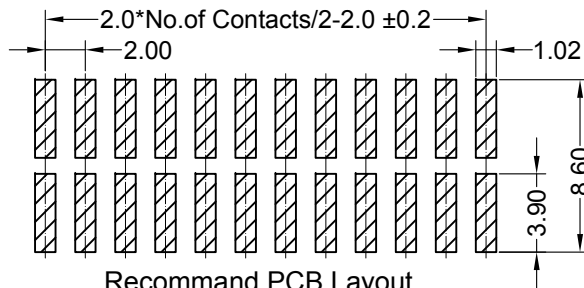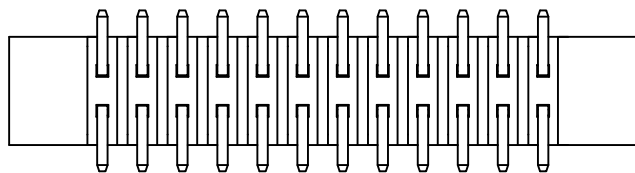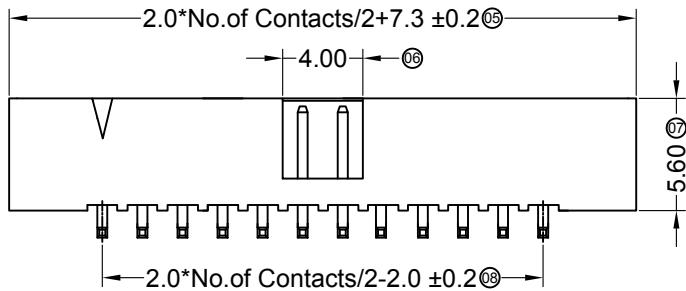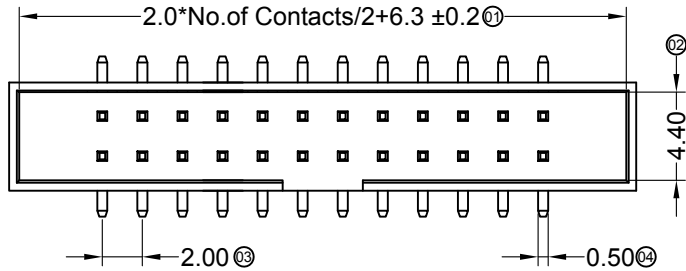

**Specifications :**

- Voltage rating: 500V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

4601 K V S- 2\*XX X-6T V01 XX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: K-Cowfish Longhorn Connector
- ③ Welding Board Angle: V-180°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: 2\*XX-Double Row
- ⑥ Plug the Pin & Special No. :
- ⑦ Material: 6T -PA6T 94V-0
- ⑧ Plating Category: V01- Gold Flash
- ⑨ Color : Blank-Natural Color

4601KVS-2*XX-6TV01	PA6T UL 94V-0	Brass	Gold-Flash	4601H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With SWB Housing

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10

**SWB** 思索连接器有限公司  
 Terminal & Connectors SWB CONNECTORS CO., LTD

APPROVAL	CHECK	DRAWN	DATA
Bob Sun	Jova Lau	sylvia	2014/10/14

PART NO. 4601KVS-2*XX-6TV01			
TITLE 2.00 mm Crimp Style Connectors			
UNIT	SCALE	NUMBER	REV
MM	1:1	A-012	A