
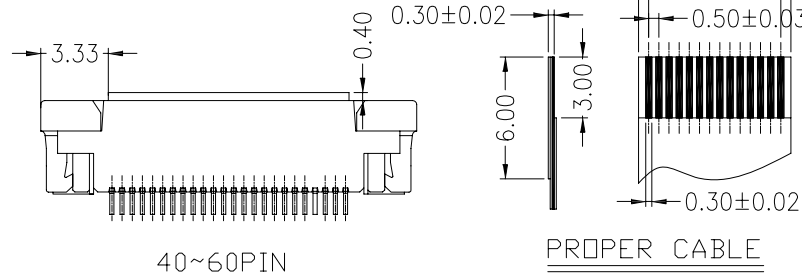
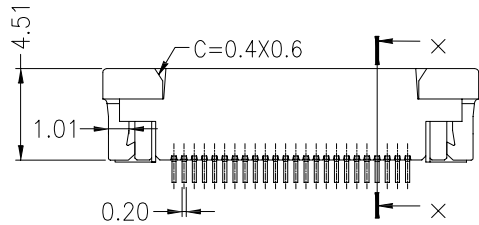
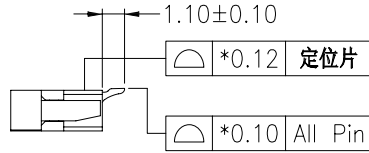
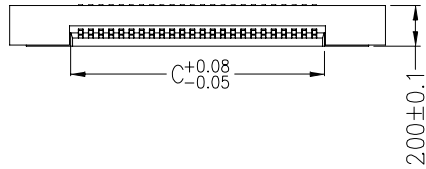
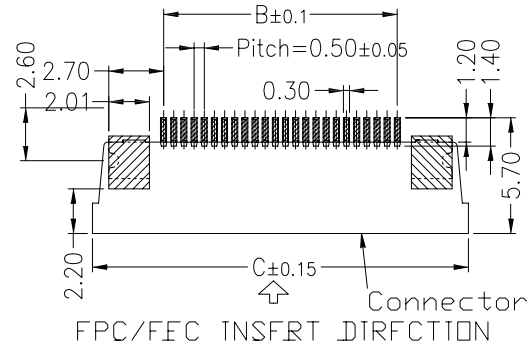


RoHS Lead-free

P.C.B.Layout

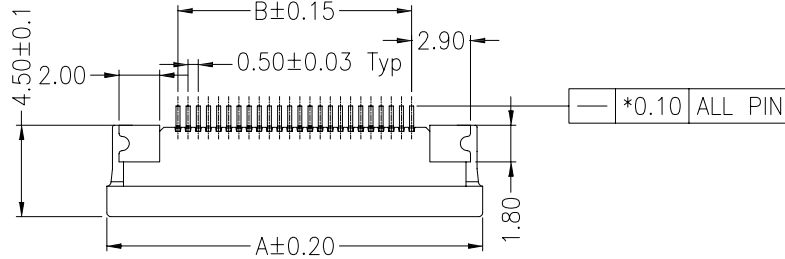

■ Electrical Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤40mΩ

0522 W R S-XX A -LP SW XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category:
W-wafer
- ③ Welding Board Angle:
R-90°
- ④ Welding Way:
S-SMT ;
- ⑤ Row No.-Pin No.
XX-Single row
- ⑥ Plug the Pin & Special NO.
A-drawer type , upper contact ,H=2.00mm
- ⑦ Material:
LP-LCP 94V-0
- ⑧ Planting Category:
G:Gold-Plated Contact
*01-Gold Flash ; *02-2u" ; *03-3u" ; *05-5u"
*10-10u" ; *15-15u" ; *30-30u" ; *50-50u"
SN-Bright tin plating 70-120u"
SN1-Bright tin plating 120u"Min. ;
SW-Matte tin
- ⑨ Color:
Blank-natural color

Poles	Dimensions (mm)		
	A	B	C
4	8.50	1.50	2.60
5	9.00	2.00	3.10
6	9.50	2.50	3.60
7	10.00	3.00	4.10
8	10.50	3.50	4.60
9	11.00	4.00	5.10
10	11.50	4.50	5.60
11	12.00	5.00	6.10
12	12.50	5.50	6.60
13	13.00	6.00	7.10
14	13.50	6.50	7.60
15	14.00	7.00	8.10
16	14.50	7.50	8.60
17	15.00	8.00	9.10
18	15.50	8.50	9.60
19	16.00	9.00	10.10
20	16.50	9.50	10.60
21	17.00	10.00	11.10
22	17.50	10.50	11.60
23	18.00	11.00	12.10
24	18.50	11.50	12.60
25	19.00	12.00	13.10
26	19.50	12.50	13.60
27	20.00	13.00	14.10
28	20.50	13.50	14.60
29	21.00	14.00	15.10
30	21.50	14.50	15.60
31	22.00	15.00	16.10
32	22.50	15.50	16.60
33	23.00	16.00	17.10
34	23.50	16.50	17.60
35	24.00	17.00	18.10
36	24.50	17.50	18.60
37	25.00	18.00	19.10
38	25.50	18.50	19.60
39	26.00	19.00	20.10
40	26.50	19.50	20.60
41	27.00	20.00	21.10
42	27.50	20.50	21.60
43	28.00	21.00	22.10
44	28.50	21.50	22.60
45	29.00	22.00	23.10
46	29.50	22.50	23.60
47	30.00	23.00	24.10
48	30.50	23.50	24.60
49	31.00	24.00	25.10
50	31.50	24.50	25.60
51	32.00	25.00	26.10
52	32.50	25.50	26.60
53	33.00	26.00	27.10
54	33.50	26.50	27.60
55	34.00	27.00	28.10
56	34.50	27.50	28.60
57	35.00	28.00	29.10
58	35.50	28.50	29.60
59	36.00	29.00	30.10
60	36.50	29.50	30.60

0522WRS-XXA-LPSW	LCP UL 94V-0	LCP UL 94V-0	Phosphor Bronze	Matte tin	Phosphor Bronze	Matte tin	1,000Pcs
PART NO	Material	Material(Cover)	Material(Pin)	Finish(Pin)	Material(PEG)	Finish(PEG)	Q' ty/REEL

				GENERAL TOLERANCE				东莞市思索连接器有限公司 DongGuan Siweb Connectors CO.,LTD Terminal&Connectors				PART NO.			
				.X ±0.30 .XX ±0.20 .XXX ±0.10								0522WRS-XXA-LPSW			
				PROJECT				TITLE							
				Success				0.50 mm FPC Connectors							
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	UNIT	SCALE	NUMBER	REV					
							MM	1:1	A-106	A					