
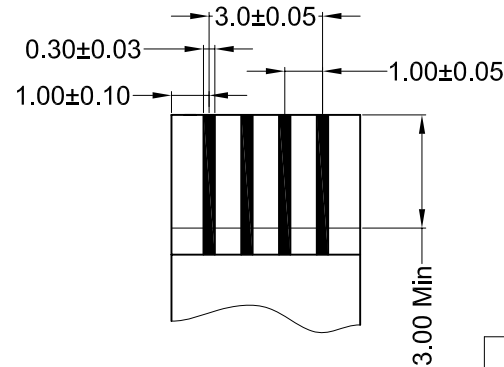
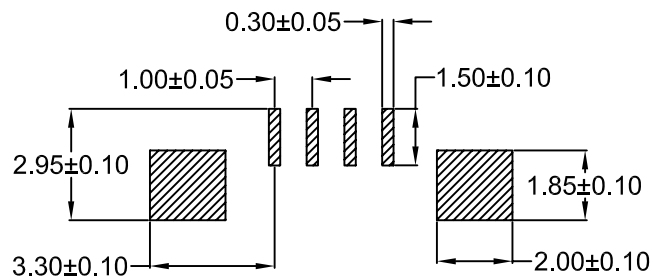
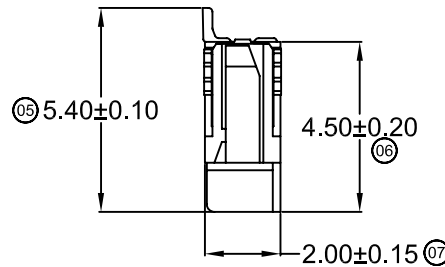
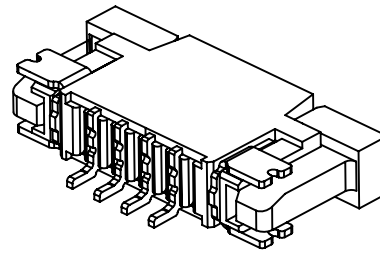
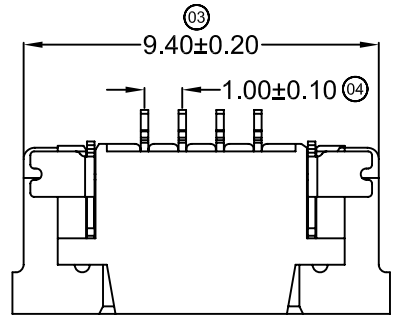


RoHS  Lead-free

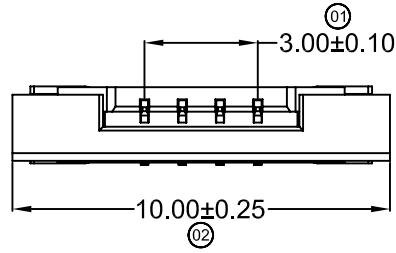

Recommended FPC Dimension

Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤40mΩ
- After environmental testing: ≤50mΩ

1021 W R S- 04 X-LP SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-Wafer
- ③ Welding Board Angle: V-180° ; R-90°
- ④ Welding Way: Blank-DIP ; S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row ; 2*XX-Double Row
- ⑥ Plug the Pin & Special No. :
- ⑦ Material: LP -LCP 94V-0
- ⑧ Plating Category: G**-Gold Plated Contact
V**- All Gold-Plated
01-Gold Flash 02-2u" 03-3u"
05-5u" 10-10u" 15-15u"
SN-Bright Tin Plating (70-120u")
SN1-Bright Tin Plating (120u" Min).
0-No Plating Material
SW- Fog Tin Plating
HS-Hight temperature Tin
- ⑨ Color : Blank-Natural Color

1021WRS-04-LPSN	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Q'ty/Reel

				GENERAL TOLERANCE				富爾電子有限公司				PART NO. 1021WRS-04-LPSN				
				.X ±0.30				APPROVAL				TITLE 1.00 mm FPC connectors				
				.XX ±0.20								CHECK				DRAWN Jova
				.XXX ±0.10				PROJECT				DATA 2013/10/14				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		DRAWN		DATA		UNIT	SCALE	NUMBER	REV
							① ②		Jova		2013/10/14		MM	1:1	----	A