



RoHS  Lead-free

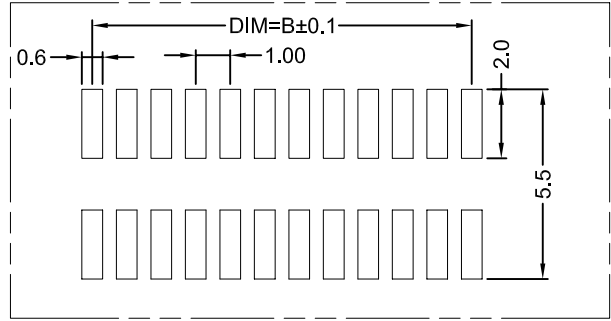




PCB Layout

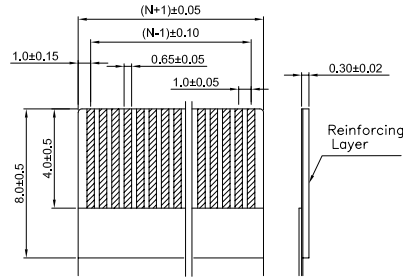

RECOMMENDED FFC/FPC DIM.

■ Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤40mΩ
- After environmental testing: ≤50mΩ

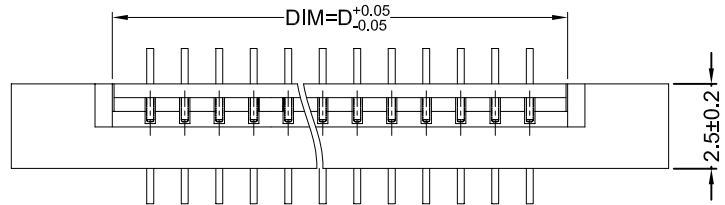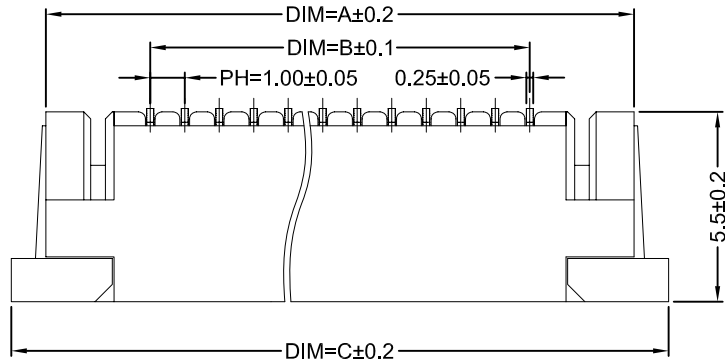

1025 W V S-XX X-LP V01XX

- ① Series No.
 ② Category:
 W-wafer
 ③ Welding Board Angle:
 R-180°
 ④ Welding Way:
 S-SMT
 ⑤ Row No.-Pin No.
 XX-Single row
 ⑥ Special NO.
 ⑦ Material:
 LP-LCP 94V-0
 ⑧ Planting Category:
 V:All Gold-Plated
 G:Gold-Plated Contact
 *01-Gold Flash ; *02-2U" ; *03-3U" ; *05-5U"
 *10-10U" ; *15-15U" ; *30-30U" ; *50-50U"
 SN-Bright tin plating 70-120U"
 SW-Fog Tin plating
 ⑨ Color:
 Blank-natural color

Poles	Dimension(mm)			
	A	B	C	D
06	11.00	5.00	13.00	7.10
07	12.00	6.00	14.00	8.10
08	13.00	7.00	15.00	9.10
09	14.00	8.00	16.00	10.10
10	15.00	9.00	17.00	11.10
11	16.00	10.00	18.00	12.10
12	17.00	11.00	19.00	13.10
13	18.00	12.00	20.00	14.10
14	19.00	13.00	21.00	15.10
15	20.00	14.00	22.00	16.10
16	21.00	15.00	23.00	17.10
17	22.00	16.00	24.00	18.10
18	23.00	17.00	25.00	19.10
19	24.00	18.00	26.00	20.10
20	25.00	19.00	27.00	21.10
21	26.00	20.00	28.00	22.10
22	27.00	21.00	29.00	23.10
23	28.00	22.00	30.00	24.10
24	29.00	23.00	31.00	25.10
25	30.00	24.00	32.00	26.10
26	31.00	25.00	33.00	27.10
27	32.00	26.00	34.00	28.10
28	33.00	27.00	35.00	29.10
29	34.00	28.00	36.00	30.10
30	35.00	29.00	37.00	31.10

1025WVS-XX-LPSN	LCP UL 94V-0	Phosphor bronze	Tin-Plated	1,000Pcs
PART NO	Material(Housing)	Material(Contacts)	Finish(Contacts)	Q' ty/Reel

				GENERAL TOLERANCE				PART NO.							
				.X ±0.30				1025WVS-XX-LPSN							
				.XX ±0.20				TITLE							
				.XXX ±0.10				1.00mm FPC Connectors							
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
							Success	Sun Kaibao	Luna	2013/09/02		MM	1:1	A-106	A

SWB 东莞市思索连接器有限公司
 Terminal Connectors DongGuan Siweb Connectors CO.,LTD