



■ Specifications :



- Voltage rating: 50V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ
- Mark "*" Indicate Dimensions Need To Controlled In Emphasis

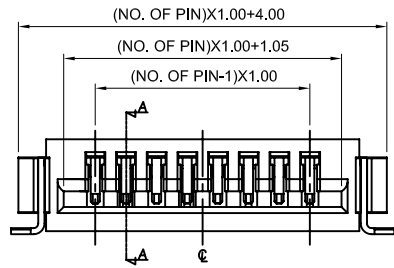

1027 W R S-XX X -LP SW XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category:
W-wafer
- ③ Welding Board Angle:
R-90°
- ④ Welding Way:
S-SMT ;
- ⑤ Row No.-Pin No.
XX-Single row
- ⑥ Plug the Pin & Special NO.
- ⑦ Material:
LP-LCP 94V-0
- ⑧ Planting Category:
G:Gold-Plated Contact
*01-Gold Flash ; *02-2u" ; *03-3u" ; *05-5u"
*10-10u" ; *15-15u" ; *30-30u" ; *50-50u"
SN-Bright tin plating 70-120u"
SN1-Bright tin plating 120u"Min. ;
SW-Matte tin
- ⑨ Color:
Blank-natural color

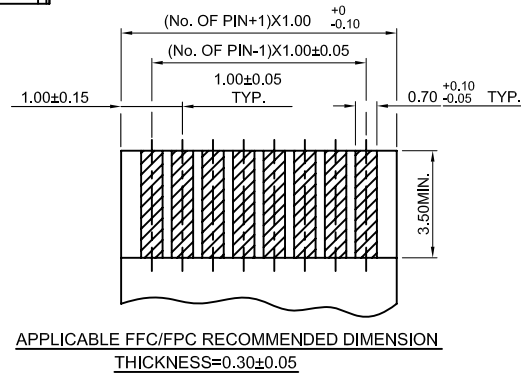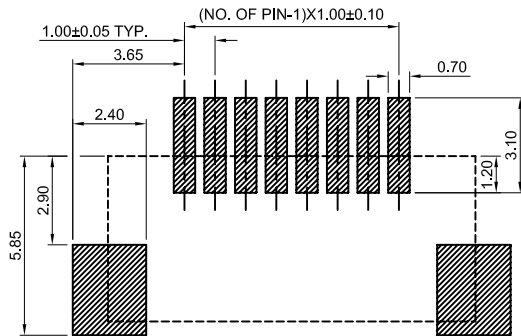

1027WRS-XX-LPSW	LCP UL 94V-0	LCP UL 94V-0	Phosphor Bronze	Matte tin	Phosphor Bronze	Matte tin	1,000Pcs
PART NO	Material	Material(Cover)	Material(Pin)	Finish(Pin)	Material(PEG)	Finish(PEG)	Q' ty/REEL

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10

SWB 东莞市思索连接器有限公司
Terminal Connectors DongGuan Siweb Connectors CO.,LTD

APPROVAL CHECK DRAWN DATA

PART NO. 1027WRS-XX-LPSW
TITLE 1.00 mm FPC Connectors

PROJECT 

SL 2013/10/29

UNIT	SCALE	NUMBER	REV
MM	1:1	A-106	A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------