


正脚线路板
Positive-needle circuit board

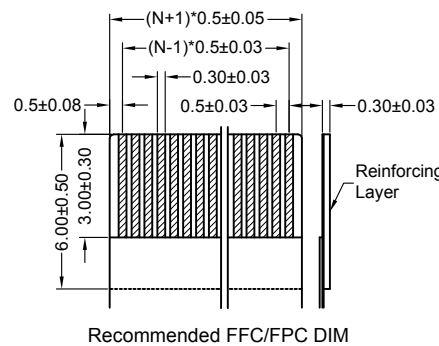

Recommended FFC/FPC DIM


- Specifications :
- Voltage rating: 50V AC / DC
 - Current rating: 0.4A AC / DC
 - Withstanding voltage: 200V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥500MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ

0505 W V S-XX P1-LP SW XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row
- ⑥ Plug the Pin & Special No: P1- LBW TYPE
- ⑦ Material: LP -LCP 94V-0
- ⑧ Plating Category: SW-Matte Tin Plating
- ⑨ Color : Blank-Natural Color

Poles	Dimensions(mm)					Poles	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
04	7.60	6.50	1.50	2.60		33	22.10	21.00	16.00	17.10	
05	8.10	7.00	2.00	3.10		34	22.60	21.50	16.50	17.60	4.40
06	8.60	7.50	2.50	3.60		35	23.10	22.00	17.00	18.10	
07	9.10	8.00	3.00	4.10		36	23.60	22.50	17.50	18.60	
08	9.60	8.50	3.50	4.60		37	24.10	23.00	18.00	19.10	
09	10.10	9.00	4.00	5.10		38	24.60	23.50	18.50	19.60	
10	10.60	9.50	4.50	5.60		39	25.10	24.00	19.00	20.10	
11	11.10	10.00	5.00	6.10		40	25.60	24.50	19.50	20.60	
12	11.60	10.50	5.50	6.60		41	26.10	25.00	20.00	21.10	
13	12.10	11.00	6.00	7.10		42	26.60	25.50	20.50	21.60	
14	12.60	11.50	6.50	7.60		43	27.10	26.00	21.00	22.10	
15	13.10	12.00	7.00	8.10		44	27.60	26.50	21.50	22.60	
16	13.60	12.50	7.50	8.60		45	28.10	27.00	22.00	23.10	
17	14.10	13.00	8.00	9.10		46	28.60	27.50	22.50	23.60	
18	14.60	13.50	8.50	9.60		47	29.10	28.00	23.00	24.10	
19	15.10	14.00	9.00	10.10		48	29.60	28.50	23.50	24.60	
20	15.60	14.50	9.50	10.60		49	30.10	29.00	24.00	25.10	
21	16.10	15.00	10.00	11.10		50	30.60	29.50	24.50	25.60	
22	16.60	15.50	10.50	11.60		51	31.10	30.00	25.00	26.10	
23	17.10	16.00	11.00	12.10		52	31.60	30.50	25.50	26.60	
24	17.60	16.50	11.50	12.60		53	32.10	31.00	26.00	27.10	
25	18.10	17.00	12.00	13.10		54	32.60	31.50	26.50	27.60	
26	18.60	17.50	12.50	13.60		55	33.10	32.00	27.00	28.10	
27	19.10	18.00	13.00	14.10		56	33.60	32.50	27.50	28.60	
28	19.60	18.50	13.50	14.60		57	34.10	33.00	28.00	29.10	
29	20.10	19.00	14.00	15.10		58	34.60	33.50	28.50	29.60	
30	20.60	19.50	14.50	15.60		59	35.10	34.00	29.00	30.10	
31	21.10	20.00	15.00	16.10		60	35.60	34.50	29.50	30.60	
32	21.60	20.50	15.50	16.60							

0505WVS-XXP1-LPSW	LCP UL 94V-0	Phosphor Bronze	Brass	Matte Tin Plated
PART NO	Material (Housing&Slider)	Material(Contacts)	Material(Fitting)	(Fixed Tabs and Pin)

							GENERAL TOLERANCE	 思索连接器有限公司 SWB CONNECTORS CO.,LTD	PART NO. 0505WVS-XXP1-LPSW						
							.X ±0.30 .XX ±0.20 .XXX ±0.10		TITLE 0.50mm FPC Style Connectors						
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
1			2				④ ⑤			sylvania	2014/04/15	MM	1:1	A-xxx	A