


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	△	變更料號	2008.10.29	彭恩城
04	△	依上級要求變更圖號	2011.01.04	李芳忠

Specifications  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: Thermoplastic, UL 94V-0  
 PBT or the equivalent material  
 All materials must meet Greenconn requirement for environment protection.

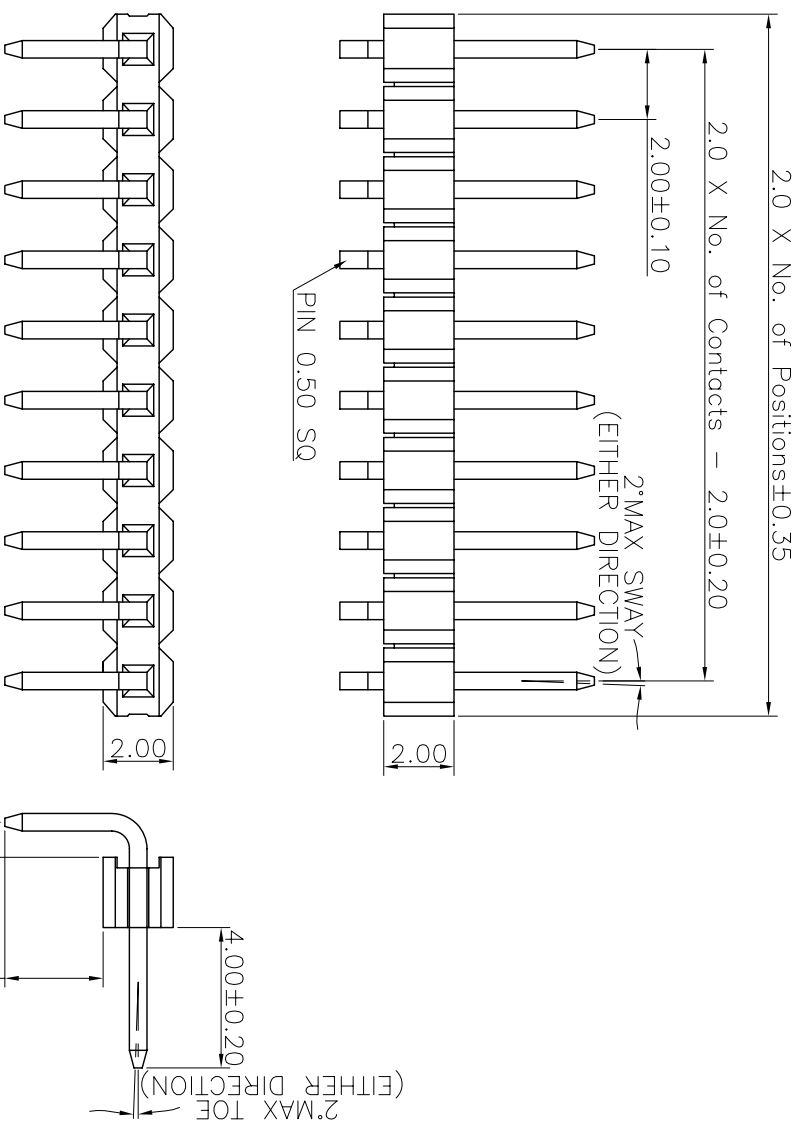


### Ordering Information

△ G PFB101 - XX XX A 001 A 1 B X

No. of Pins per Row  
 △ 02~40  
 Standard Plating  
 02=Gold Plating  
 Selective Plating  
 01=Tin  
 05=Gold Flash/Tin

Color  
 1=Black  
 Standard Packing  
 A=Box  
 Selective Packing  
 C=Tube

Recommended P.C.Board  
 Layout  
 (Tolerance: ±0.05)



**格稜 股份 有限 公司**  
**Greenconn Corporation**

REV.	UNIT.	SCALE.	PAGE.	DESIGN:	DATE:	DWG. NO.	TITLE.
04	mm	5:1	1/1	李芳忠	2011.01.04	△ △ GPFB101-CA1AB	2.00 PIN HEADER
				劉北平	2011.01.04		SINGLE ROW R/A TYPE
				李輝	2011.01.04		CONNECTOR
				cc_li	2011.01.04	GPFB101-XXXX A001A1BX	

A 1 2 3 4 5 6 7 8 9