

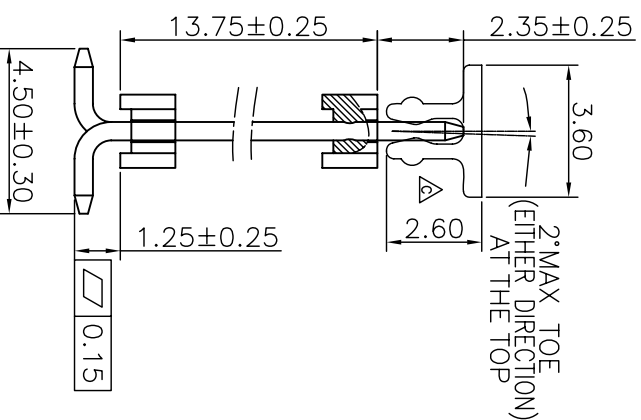
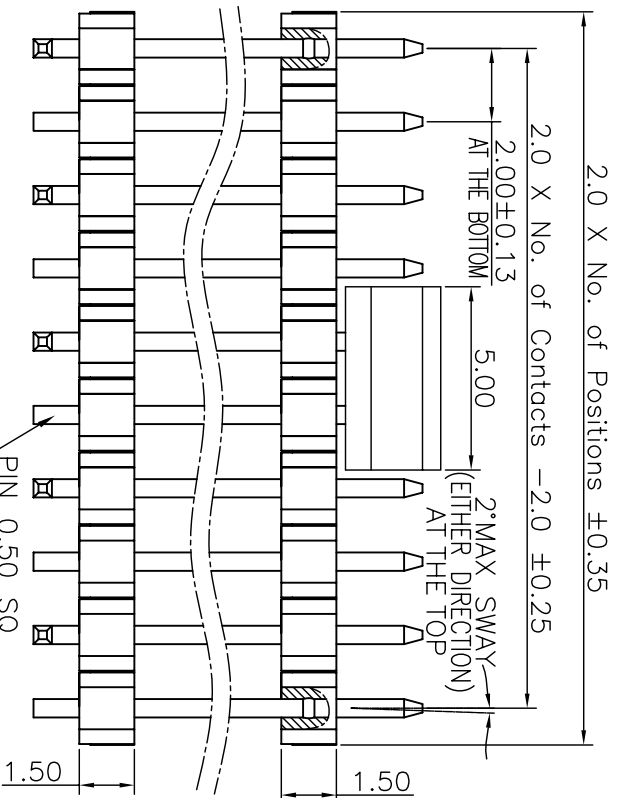


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2009.03.26	車 激
B	△	依上級要求變更圖號	2011.12.18	李芳忠
C	△	依上級要求變更CAP外觀	2014.07.15	李芳忠

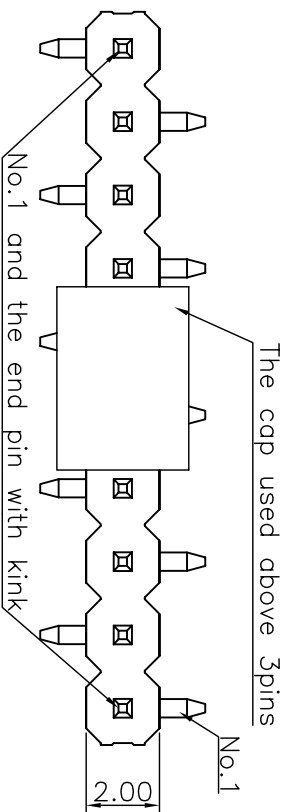

Specifications  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material  
 All materials must meet Greencomm hazardous substances control standards.

Recommended P.C.Board  
 Layout  
 (Tolerance: ±0.05)

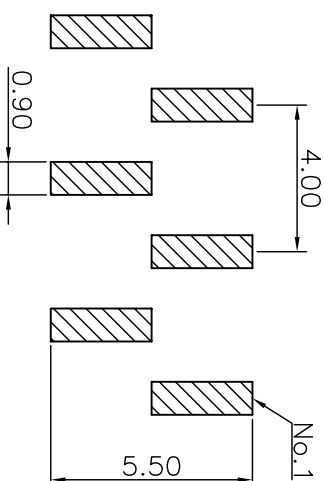

### Ordering Information

G PFC104 - XX XX A 008 B 1 B X

No. of Pins per Row  
 02~40  
 Standard Plating  
 02=Gold Flash  
 Selective Plating  
 01=Tin

Color  
 1=Black  
 Standard Packing  
 C=Tube  
 Selective Packing  
 A=Box  
 E=Cap+Tube  
 F=Cap+Tape&Reel

格 菱 股 份 有 限 公 司  
**Greencomm Corporation**

REV.	UNIT.	SCALE.	PAGE.	GENERAL TOLERANCE
C	mm	5:1	1/1	X: ±5.0° X: ±3.0° .XX: ±2.0° .XXX: ±1.0°

DESIGNED:	DATE:	CHECKED:	DATE:	CO SIGNED:	DATE:	APPROVED:	DATE:
李芳忠	2014.07.15			劉北平	2014.07.15		

DWG. NO.	PART NO.
GPFC104-CA8BB	GPFC104-XXXX A008B1BX

TITLE:  
 2.00 PIN HEADER  
 SINGLE ROW SMT TYPE  
 CONNECTOR

A 1 2 3 4 5 6 7 8 9