
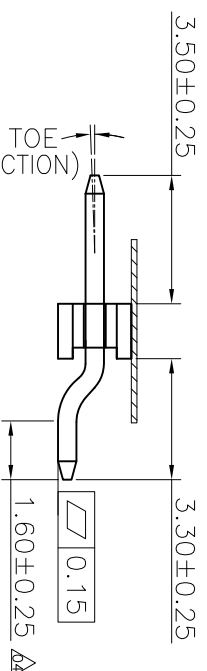
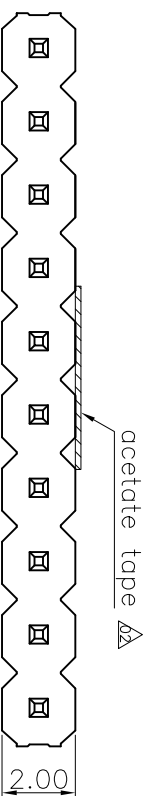



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	AA	轉環保圖並加圓形膠紙	2007.05.03	黃美君
03	AA	CHANGE PART NO.	2007.05.08	黃美君
04	AA	Change Dimension	2008.11.18	李 輝
05	AA	變更料號	2009.06.11	彭恩城
06	AA	變更圖號	2011.11.14	曹 熙

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 500V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

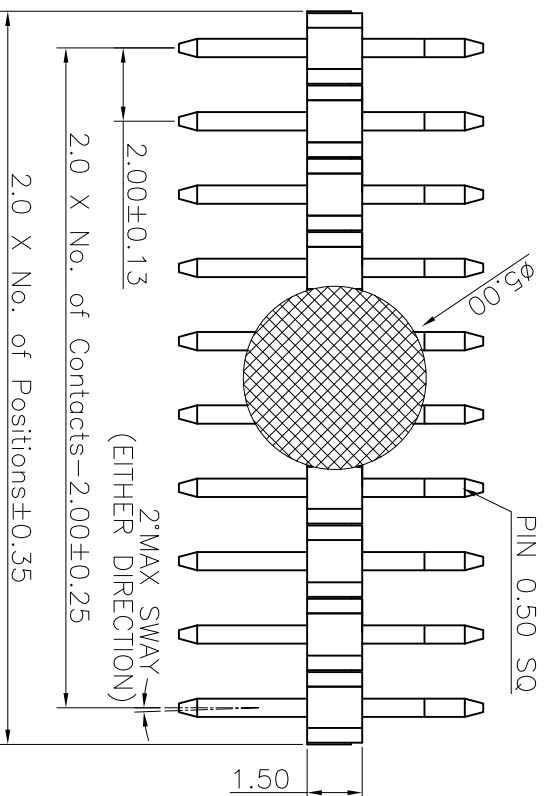

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

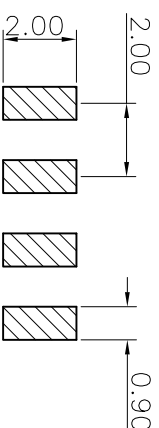

Ordering Information

G PFD102 - XX XX A 001 B 1 B X AA

No. of Pins per Row: 02~40

Standard Plating: 02=Gold Flash

Selective Plating: 01=Tin, 05=Gold Flash/Tin

Color: 1=Black

Standard Packing: C=Tube

Selective Packing: A=box, G=acetate tape +Tube, H=acetate tape +Tape&Reel

格 菱 股 份 有 限 公 司 Greenconn Corporation		GENERAL TOLERANCE X. ±5.0° .X. ±3.0° .XX ±2.0° .XXX ±1.0°		DESIGN: 曹 熙 CHECKED: 劉北平 AUDITED: 李 輝 APPROVED: cc_li		DWG. NO. AA AA GPFD102-CA1BB		TITLE: 2.00 PIN HEADER SINGLE ROW SMT TYPE CONNECTOR	
REV. 06	UNIT. mm	SCALE. 5:1	PAGE. 1/1						