
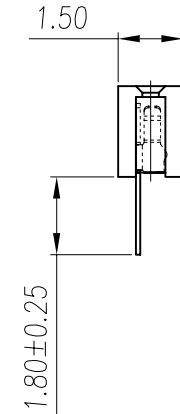
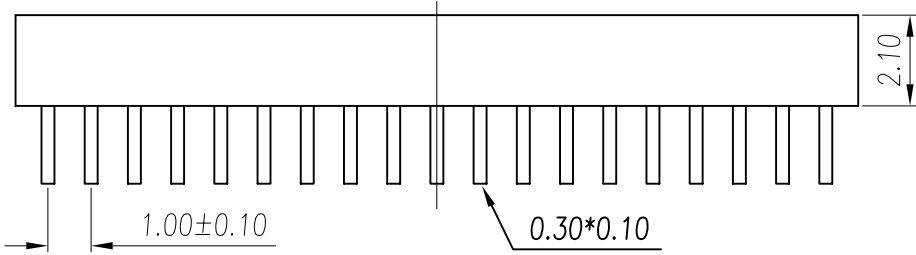


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2009.01.16	許承佑
02	△△	修改特性統一	2010.03.09	車 激
03	△△	變更圖號與注解	2011.07.13	黃明霞

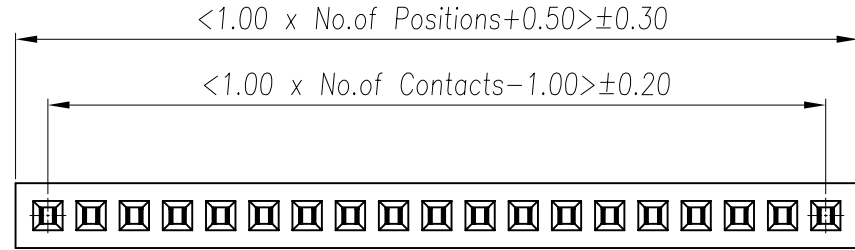

Specifications

Current Rating: 1Amp △△
 Insulation Resistance: 1000MΩ Min △△
 Dielectric Withstanding: 300VAC △△
 Contact Resistance: 20mΩ Max. △△
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 △△ Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet Greenconn requirement for environment protection

Ordering Information

C SCA116 - XX XX A001 C 1 A X

No. of Pins per Row: 02~40
 Standard Plating: 02=Gold Flash
 Selective Plating: 01=Tin, 05=Gold Flash/Tin
 Color: 1=Black
 Standard: A=Box, C=Tube

RECOMMENDED P.C.B. LAYOUT

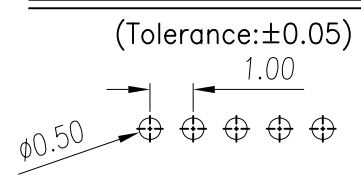

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: 黃明霞	DATE: 2011.07.13
CHECKED: 李新華	DATE: 2011.07.13
AUDITED: LEAR	DATE: 2011.07.13
APPROVED: LINK	DATE: 2011.07.13

DWG. NO. CSCA116-CA1CA
PART NO. CSCA116-XX XX A001C1AX

TITLE: 1.00 FEMALE HEADER SINGLE ROW DIP TYPE

REV. 03	UNIT. mm	SCALE. 6:1	PAGE. 1/1	⊕
---------	----------	------------	-----------	---