
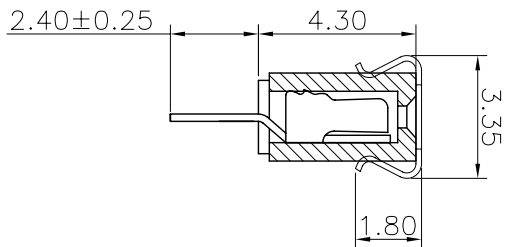
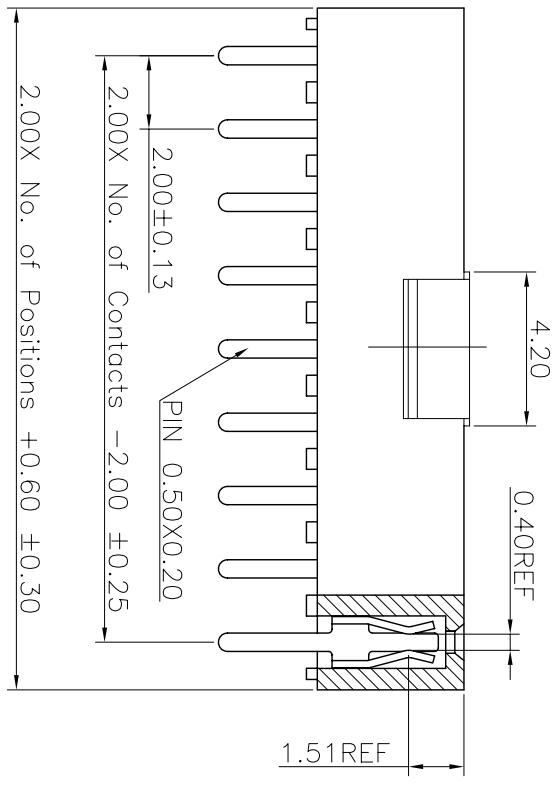


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
04	AA	變更料號	2009.02.25	趙章池
05	AA	依上級要求變更圖號	2012.05.21	李芳忠

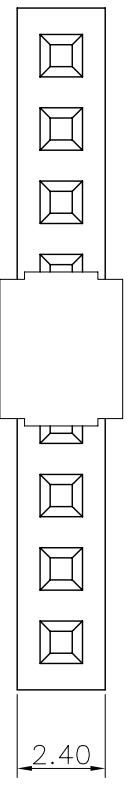

Specifications  
 Current Rating:2Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:500VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material  
 All materials must meet Greenconn requirement for environment protection.

### Ordering Information


CSFA101 - XX XX A 001 B 1 A X

No. of Pins per Row: 02~40

Standard Plating  
 02=Gold Flash  
 Selective Plating  
 01=Tin  
 05=Gold Flash/Tin

Color  
 1=Black

Standard Packing  
 A=Box  
 Selective Packing  
 C=Tube  
 E=Cap+Tube  
 F=Cap+Tape&Reel

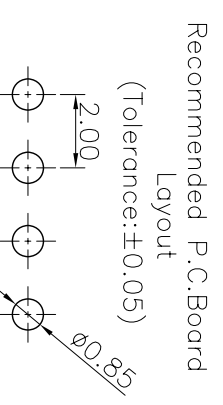

<b>格菱股份有限公司</b> <b>Greenconn Corporation</b>		GENERAL TOLERANCE X.±5.0° X.±3.0° .XX±2.0° .XXX±1.0°		DESIGN: 李芳忠 CHECKED: 劉北平 AUDITED: 李輝 APPROVED: cc_li		DWG. NO. AA CA1BA PART NO. AA CSFA101-XXXX A001B1AX		TITLE: 2.00 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR	
REV. 05	UNIT. mm	SCALE. 5:1	PAGE. 1/1						

