



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	△	變更料號	2009.02.24	李彬彬
04	△	依上級要求變更圖號	2012.04.25	李芳忠




Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V−0 Nylon 6T or the equivalent material
All materials must meet Greenconn requirement for environment protection.

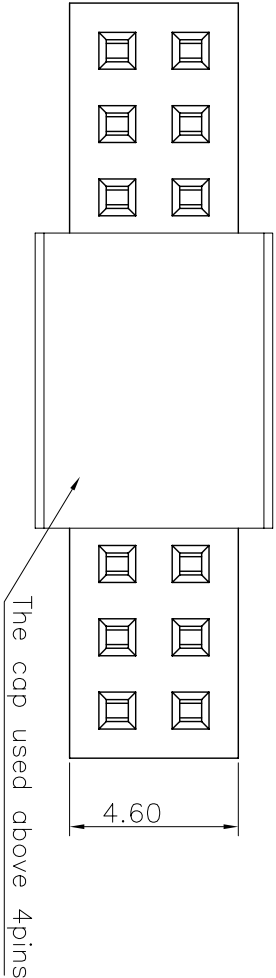

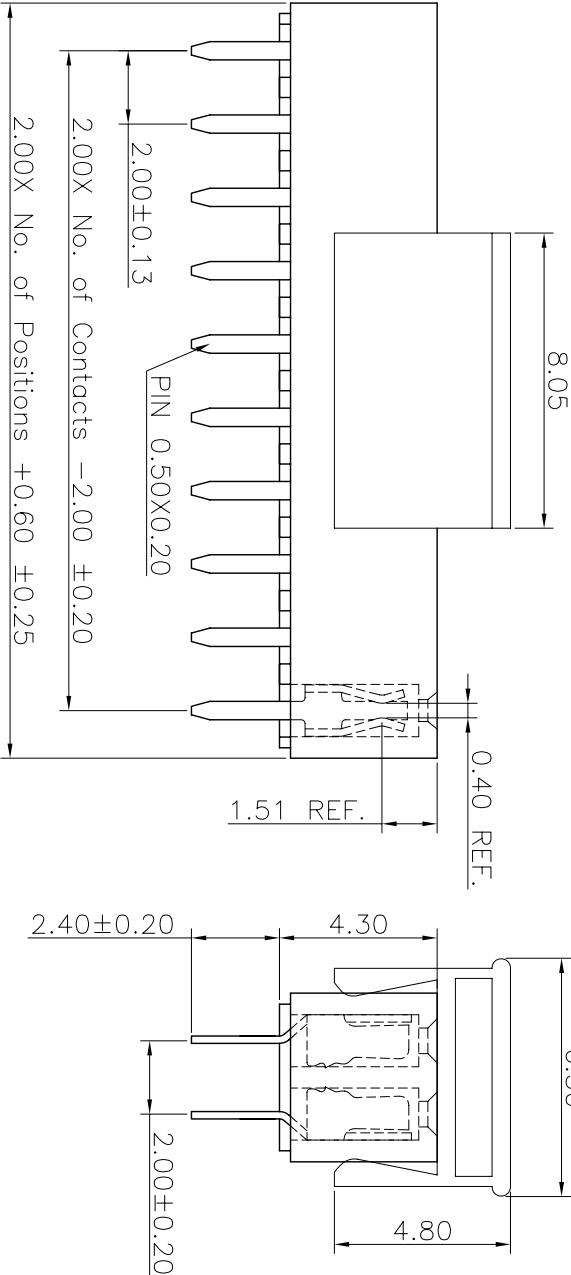

Ordering Information

C SFA201 – XX XX A 001 B 1 A X

No. of Pins per Row
02~40
Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin
Color
1=Black
Standard Packing
A=Box
Selective Packing
C=Tube
E=Cap+Tube
F=Cap+Tape&Reel



Recommended P.C.Board

格 菱 股 份 有 限 公 司 <i>Greenconn Corporation</i>				GENERAL TOLERANCE		DESIGN: 李 芳 忠	DATE: 2012.04.25	DWG. NO.	△3 △4 CSFA201-CA1BA	TITLE: 2.00 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR	
REV. 04	UNIT. mm	SCALE. 5:1	PAGE. 1/1			X.°±5.0°	X.±0.30	CHECKED: 劉北平	DATE: 2012.04.25		PART NO. △3 CSFA201-XXXX A001B1AX
						.X°±3.0°	.X±0.25	AUDITED: 李 輝	DATE: 2012.04.25		
						.XX°±2.0°	.XX±0.15	APPROVED: cc_li	DATE: 2012.04.25		
						.XX°±1.0°	.XXX±0.10				