
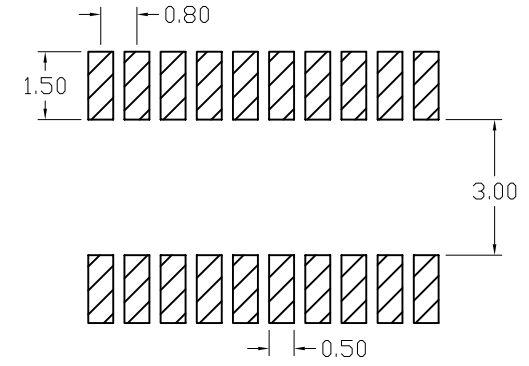
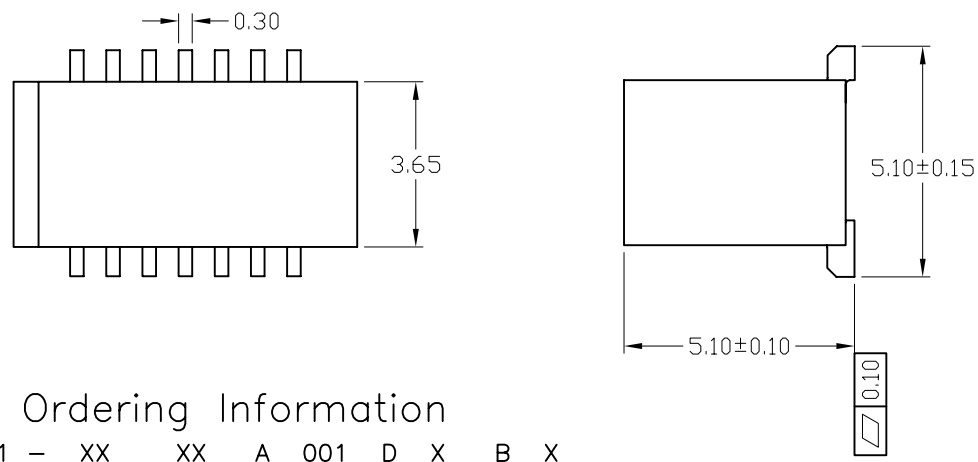


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.02.14	左國強
02	02	標注接觸點位置	2013.04.17	楊濤

NOTES:

- Specifications
 - Current Rating: 0.5Amp
 - Insulation Resistance: 500MΩ Min.
 - Dielectric Withstanding: 200V AC
 - Contact Resistance: 20mΩ Max.
 - Operating Temperature: -40°C to +105°C
- Materials
 - Contact Material: BRASS
 - Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon) or the equivalent material BLACKUL94V-0 本色
 - All materials must meet Greenconn requirement for environment protection

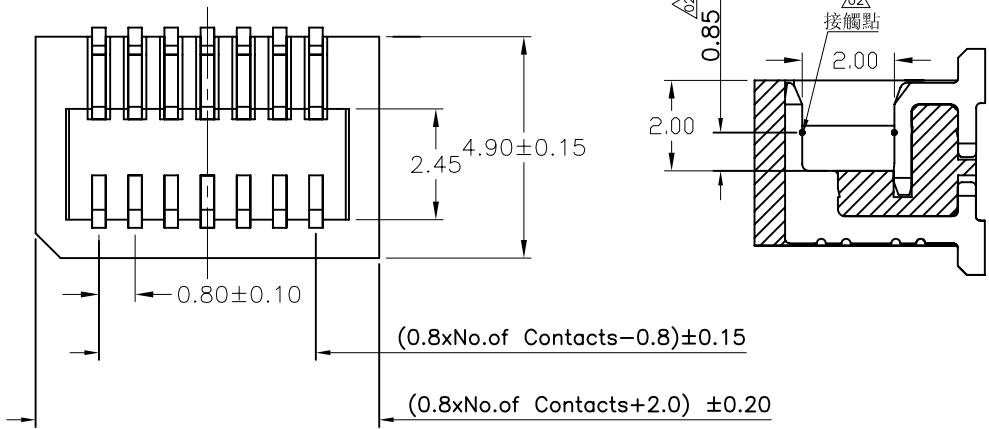

Recommended P.C.Board Layout

Ordering Information

C BBC201 - XX XX A 001 D X B X

- No. of Pins per Row: 05~30
- Standard Plating: 02=Gold Flash, Selective Plating; 01=Tin, 05=Gold Flash/Tin
- Color: E=Beign, 4=LightGoldenrodYellow
- Standard Packing: E=Tube(Manufacture+Cap), Selective Packing; F=Tape Reel(Manufacture+Cap)

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 5.0*	X. ± 0.30
.X* ± 3.0*	.X ± 0.25
.XX* ± 2.0*	.XX ± 0.15
.XXX* ± 1.0*	.XXX ± 0.10

DESIGN:	楊濤	DATE:	2013.04.17
CHECKED:	李景冲	DATE:	2013.04.17
AUDITED:	林澤雲	DATE:	2013.04.17
APPROVED:	LINK	DATE:	2013.04.17

DWG. NO.	CBBC201-CA1DB
PART NO.	CBBC201-XXXXA001DXBX

TITLE:
0.8 B-T-B
FEMALE ASSEMBLY

REV.	02	UNIT.	mm	SCALE.	6:1	PAGE.	1/1
------	----	-------	----	--------	-----	-------	-----