


| REV. | LOCAS. | DESCRIPTION                       | DATE       | DRAWN |
|------|--------|-----------------------------------|------------|-------|
| 01   | NEW    | BATCH PRODUCTION INITIAL RELEASE. | 2014.11.06 | 吳才仙   |

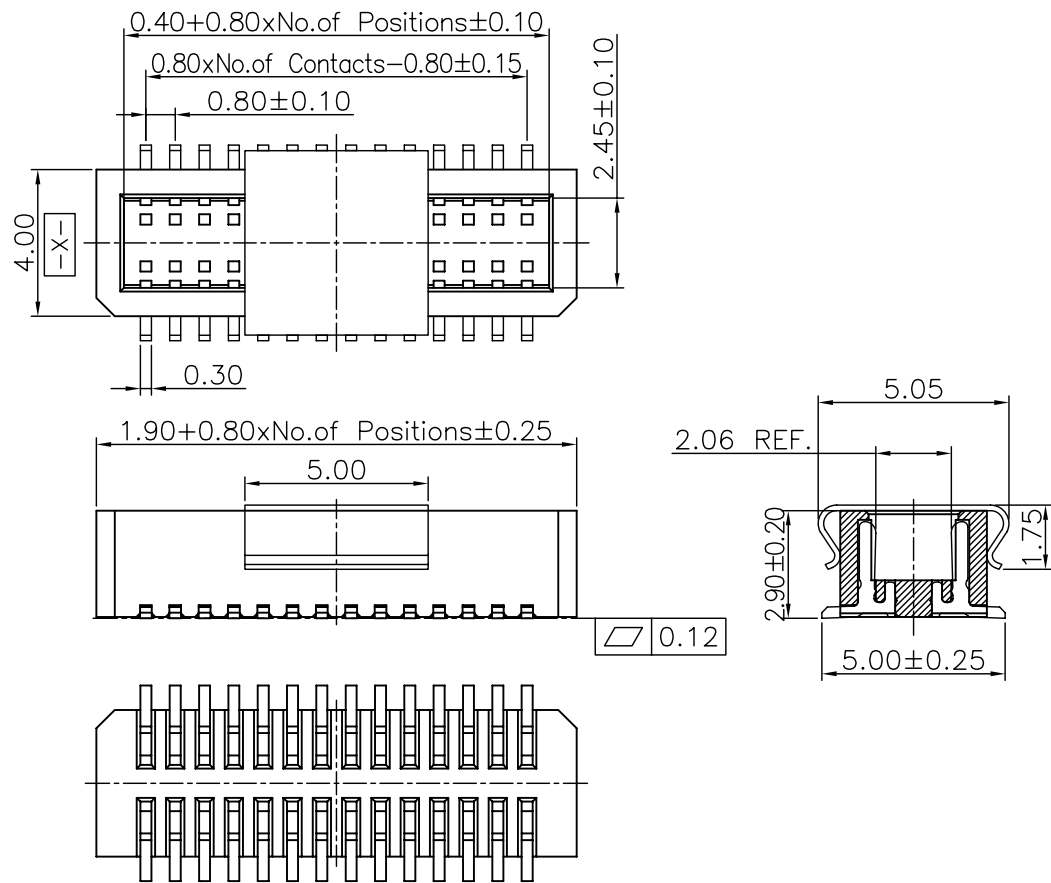


Specifications  
 Current Rating:0.5Amp  
 Insulation Resistance:500MΩMin.  
 Dielectric Withstanding Voltage:200VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon9T(Halogen Free) or the equivalent material  
 All materials must meet GREENCONN hazardous substances control standards.

### Ordering Information

CBBC241 - XX XX A 001 J E A X

No. of Pins per Row 04~25  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin 05=Gold Flash/Tin  
 COLOR E=Beige  
 Standard Packing C=Tube  
 Selective Packing D=tape reel

### Recommended P.C.Board Layout

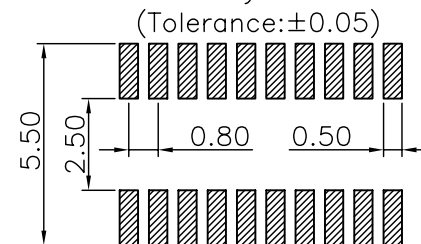

格稜股份有限公司  
**Greenconn Corporation**

| GENERAL TOLERANCE |           |
|-------------------|-----------|
| X.*±5.0°          | X.±0.30   |
| .X*±3.0°          | .X±0.25   |
| .XX*±2.0°         | .XX±0.15  |
| .XXX*±1.0°        | .XXX±0.10 |

|                |                  |
|----------------|------------------|
| DESIGNED: 吳才仙  | DATE: 2014.11.06 |
| CHECKED: 林萬輝   | DATE: 2014.11.06 |
| CO SIGNED: 劉北平 | DATE: 2014.11.06 |
| APPROVED: 李輝   | DATE: 2014.11.06 |

|          |                     |
|----------|---------------------|
| DWG. NO. | CBBC241-CA1JA       |
| PART NO. | CBBC241-XXXXA001JEA |

TITLE.  
 0.80 BOARD  
 TO BOARD FEMALE  
 ASSEMBLY

| REV. | UNIT. | SCALE. | PAGE. | Symbol |
|------|-------|--------|-------|--------|
| 01   | mm    | 3:1    | 1/1   | ⊕      |