
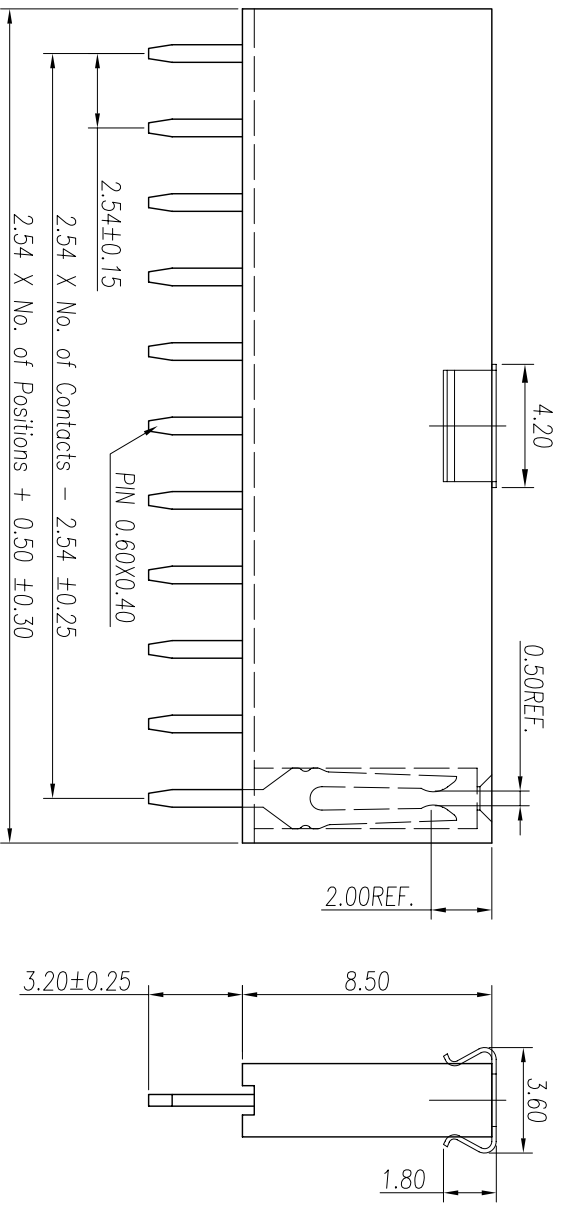


REV.	LOCALS.	DESCRIPTION	DATE	DRAWN
03	△	變更料號	2009.03.03	李彬彬
04	△	依上級要求變更圖號	2011.08.11	李芳忠



Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Thermoplastic, UL 94V-0
 PBT or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Ordering Information

C SHA101 - XX XX A 001 A X X


No. of Pins Per Row: 02~40

Standard Plating:
 02=Gold Flash
 Selective Plating
 01=Tin
 05=Gold Flash/Tin

Color:
 1=Black
 6=Grey
 K=Pnk

Standard Packing:
 A=Box
 Selective Packing
 C=Tube
 E=Cap+Tube
 F=Cap+Tube&Reel

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)



格菱股份有限公司 Greenconn Corporation		GENERAL TOLERANCE X.±5.0° X.±0.30 X.±3.0° X.±0.25 .XX±2.0° .X±0.15 .XXX±1.0° .XXX±0.10		DESIGN: 李芳忠 CHECKED: 劉北平 AUDITED: 李輝 APPROVED: cc_ji	DATE: 2011.08.11 DATE: 2011.08.11 DATE: 2011.08.11 DATE: 2011.08.11	DWG. NO.: △△ CSHA101-CA1AA	TITLE: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR
REV. 04	UNIT: mm	SCALE: 4:1	PAGE: 1/1				

