

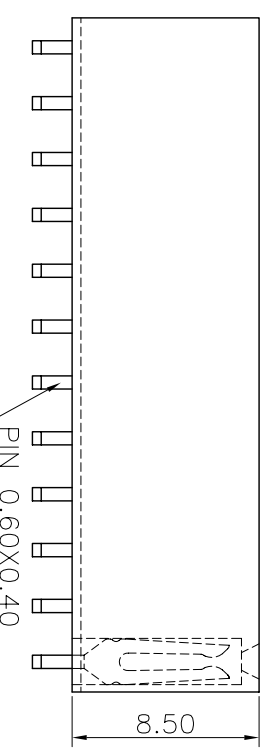


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02	△	Change Part NO.	2009.03.10	李小珍
03	△	依上級要求變更圖號	2011.09.06	李芳忠

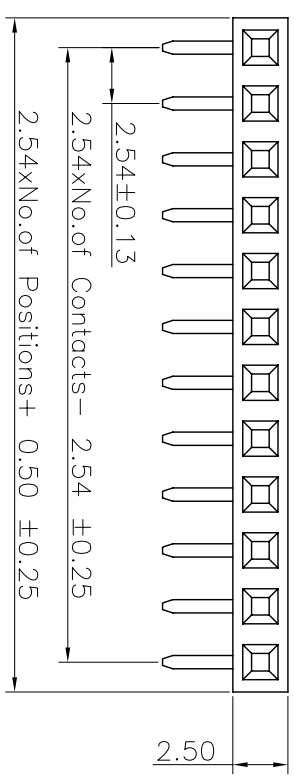

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Thermoplastic, UL 94V-0
 PBT or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Ordering Information

C SHB101 - XX XX A 001 A 1 A X


No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
B=Tray
Selective Packing
A=Box
C=Tube

Recommended P.C.Board
Layout
(Tolerance: ±0.05)



格菱股份有限公司 Greenconn Corporation				GENERAL TOLERANCE X: ±5.0° .X: ±3.0° .XX: ±2.0° .XXX: ±1.0°		DESIGN: 李芳忠 CHECKED: 劉北平 AUDITED: 李輝 APPROVED: cc_li		DWG. NO. △ CSHB101-CA1AA △		TITLE: 2.54 FEMALE HEADER SINGLE ROW R/A TYPE BASE 8.50H	
REV. 03	UNIT. mm	SCALE. 3:1	PAGE. 1/1	X: ±5.0° .X: ±3.0° .XX: ±2.0° .XXX: ±1.0°		DATE: 2011.09.06 DATE: 2011.09.06 DATE: 2011.09.06 DATE: 2011.09.06		PART NO. △ CSHB101-XXXX A001A1AX △			