



REV.	LOOKS	DESCRIPTION	DATE	DRAWN
02	△	修正可做DIP數	2008.8.9	許承佑
03	△	變更料號		彭恩城
04	△		2010.11.26	

Specifications

Current Rating: 1Amp
 Insulation Resistance: 500M Ω Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester,
 UL 94V-0 Nylon 6T
 All materials must meet Greenconn
 requirement for environment protection.

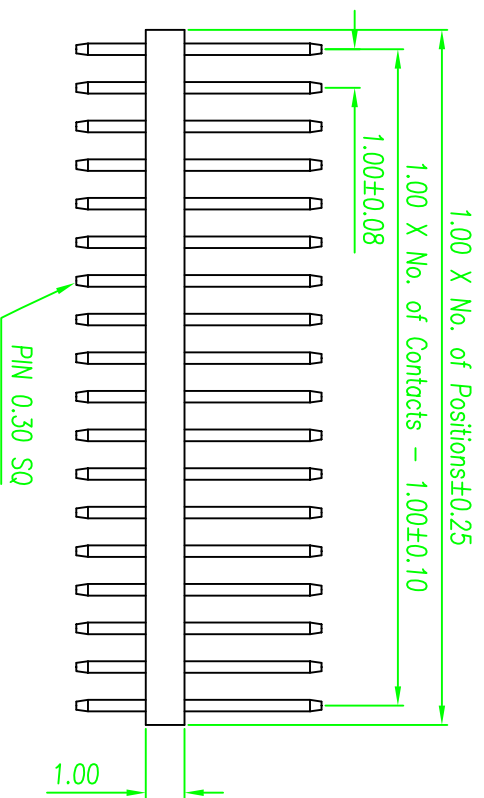

Ordering Information △

GPCA101 - XX XX A 001 B X A X


No. of Pins per Row
 02~40

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin
 ...

COLOR
 1=BLACK

Options
 D=tape reel
 F=cap+tape reel
 G=acetate tape
 H=acetate tape+tape reel
 ...

**Recommended P.C.Board
 Hole Layout**



**格菱股份有限公司
 Greenconn Corporation**

REV.	UNIT.	SCALE.	PAGE.	GENERAL TOLERANCE
04	mm	1:1	1/1	X° ± 3.0° .X° ± 2.0° .XX° ± 1.0° XXX° ± 0.5°

DESIGN:	黄明霞	DATE:	2010.11.26
CHECKED:	李新華	DATE:	2010.11.26
AUDITED:	LEAR	DATE:	2010.11.26

DWG. NO.	GPCA101-CA1BA
PART NO.	GPCA101-XXXXXA001BXAX

TITLE.
1.00*1.00 SINGLE ROW PIN HEADER DIP