

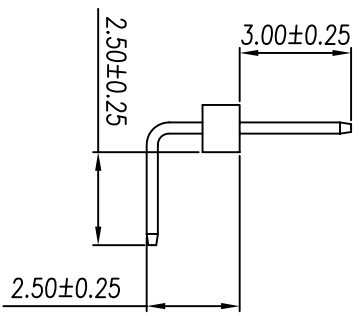
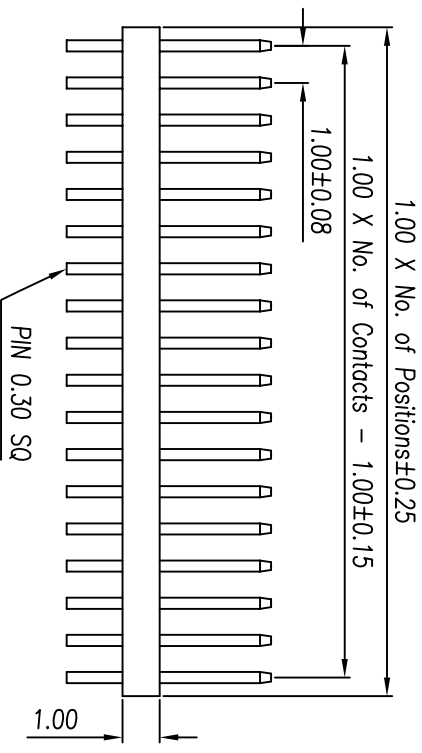


REV.	LOCALS	DESCRIPTION	DATE	DRAWN
A		INITIAL RELEASE:	2006.01.11	PI HONG BIN
01		轉量轉版發行	2007.03.29	皮洪斌
02		變更料號	2008.07.26	彭思城
03		變更新圖號	2010.12.02	黃明霞

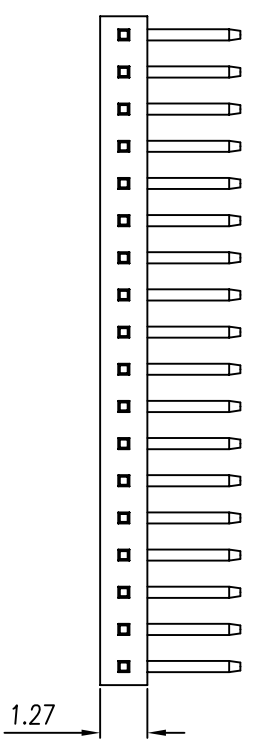

Recommended P.C.Board

Hole Layout



Specifications

- Current Rating: 1Amp
 - Insulation Resistance: 1000M Ω Min.
 - Dielectric Withstanding: 300VAC
 - Contact Resistance: 20m Ω Max.
 - Operating Temperature: -40°C to +105°C
 - Materials
 - Contact Material: Phosphor Bronze
 - Insulator Material: Polyester, UL 94V-0 LCP
- All materials must meet Greenconn requirement for environment protection.

Ordering Information

G PCB101 - XX XX A003 C 1 A X

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin

Options
D=tape reel
F=capt+tape reel
...

<p>格 菱 股 份 有 限 公 司 Greenconn Corporation</p>		<p>GENERAL TOLERANCE</p>		<p>DESIGN: 黃明霞</p>		<p>DATE: 2010.12.03</p>		<p>DWG. NO.</p>		<p>TITLE</p>	
REV. 03	UNIT. mm	SCALE. 1:1	PAGE. 1/1	X: $\pm 5.0^\circ$	X: ± 0.30	CHECKED: 李新華	DATE: 2010.12.03	GPCB101-CA3CA		PITCH 1.00 SINGLE ROW PIN HEADER	
				.XX $\pm 2.0^\circ$.XX ± 0.15	AUDITED: Leor	DATE: 2010.12.03	GPCB101-XXXXA003C1AX			
				XXX $\pm 1.0^\circ$.XXX ± 0.10						