

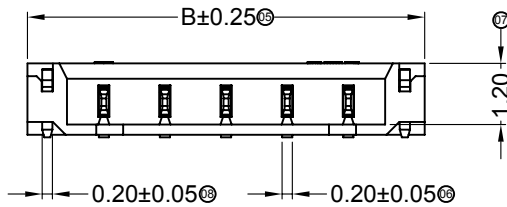
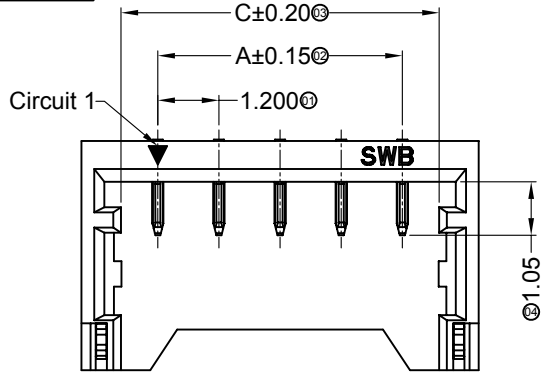




RoHS  Lead-free

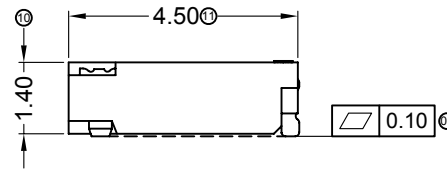

4P-5P Without Sticking Point
Scale 1:1

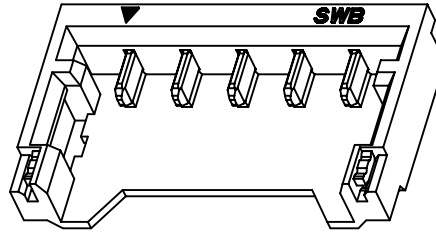

6P-7P With Sticking Point
Scale 1:1

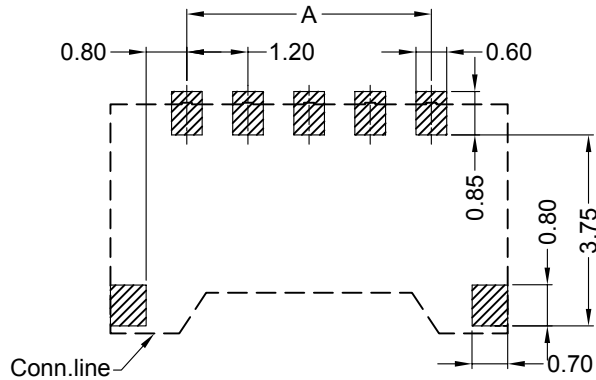

Recommended P.C.B Layout
General Tolerance±0.05

■ Specifications :


- Voltage rating: 50V AC / DC
- Current rating: 2.0A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

1224 W R S-XX L- XX V01 XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: R-Right Angle 90°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: XX-04P~07P
- ⑥ Plug the Pin & Special NO.: L-36 Edition
- ⑦ Material: LP-LCP 94V-0 ; 4T-PA4T
- ⑧ Planting Category: V01: All Gold Flash
- ⑨ Color: Blank-Natural Color Black

Poles	Dimensions(mm)		
	A	B	C
04	3.60	6.60	5.04
05	4.80	7.80	6.24
06	6.00	9.00	7.44
07	7.20	10.20	8.64

1224WRS-XXL-4TV01	PA4T UL 94V-0	Phorphos Bronze	Gold-Flash	Brass	Tin Plating Matte	1224H
1224WRS-XXL-LPV01	LCP UL 94V-0	Phorphos Bronze	Gold-Flash	Brass	Tin Plating Matte	
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With SWB Housing

2014/09/03	D	E		Modify the drawing frame format	Wuxiaotao	Jova Lau	GENERAL TOLERANCE X ±0.30 .XX ±0.20 .XXX ±0.10	
2014/08/21	C	D		Add 4T Part No	Jova Lau	Jova Lau		
2014/03/26	B	C		Space of a Whole page Changes	Jova Lau	Bob Sun		
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	



思索连接器有限公司
SWB CONNECTORS CO.,LTD

APPROVAL	CHECK	DRAWN	DATA
Bob Sun	Jova Lau	Allen	2013/08/31

PART NO.		1224WRS-XXL-XXV01	
TITLE			
1.20mm Crimp Style Connectors			
UNIT	SCALE	NUMBER	REV
MM	1:1	A-106	E